



Gooch & Housego



400 – 650nm Acousto-Optic Tunable Filter

TF525-250-6-3-GH19

An acousto-optic tunable filter for use at 400 – 650nm. Ideal for wavelength selection of Supercontinuum sources, particularly in confocal microscopy applications.

Designed to optimise diffracted beam efficiency, quality & pointing stability while maintaining high extinction ratio and low RF drive power.

Use in conjunction with the 64040-150-10MDFS-16X1 frequency synthesised driver, enables independent control of frequency, amplitude and phase of up to sixteen channels, allowing active pass band resolution and profile control.

Gooch & Housego's AOTF capability is extensive. By combining our scientific knowledge, modelling capability and engineering expertise with our renowned manufacturing skill and high quality, our products are aimed at the most discerning customers, in the most demanding applications.

Key Features:

- 400 – 650nm
- High Efficiency
- Excellent pointing stability
- High extinction ratio
- Maintains beam quality
- Low drive power

Applications:

- Biomedical:
 - Confocal Microscopy

General Specifications

Interaction material:	Tellurium Dioxide (Anisotropic)
Wavelength range:	400 - 650nm
Resolution (FWHM):	< 6nm at 525nm
Active aperture:	3mm
Incident polarisation:	Linear, vertical with respect to base
Polarisation of diffracted order:	Linear, orthogonal to input (90° rotated)
Pointing stability of diffracted order:	< ±0.01°
Beam separation:	> 3°
Diffraction efficiency:	> 90%
RF drive power:	< 100mW / channel

Recommended RF Driver: 64040-150-10MDFS-16X1




光技術をサポートする
株式会社オプトサイエンス
<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング
TEL: 03 (3356) 1064 FAX: 03 (3356) 3466 E-mail: info@optoscience.com
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館
TEL: 06 (6305) 2064 FAX: 06 (6305) 1030 E-mail: osk@optoscience.com
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル
TEL: 052 (569) 6064 FAX: 052 (569) 8064 E-mail: ngo@optoscience.com

Ordering Code

Explanation: TF525-250-6-3-GH19 (AOTF, wavelength range 400 – 650nm, 6nm resolution, 3.0mm active aperture, GH19 housing).

T	F	5	2	5	-	2	5	0	-	6	-	3	-	G	H	1	9
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

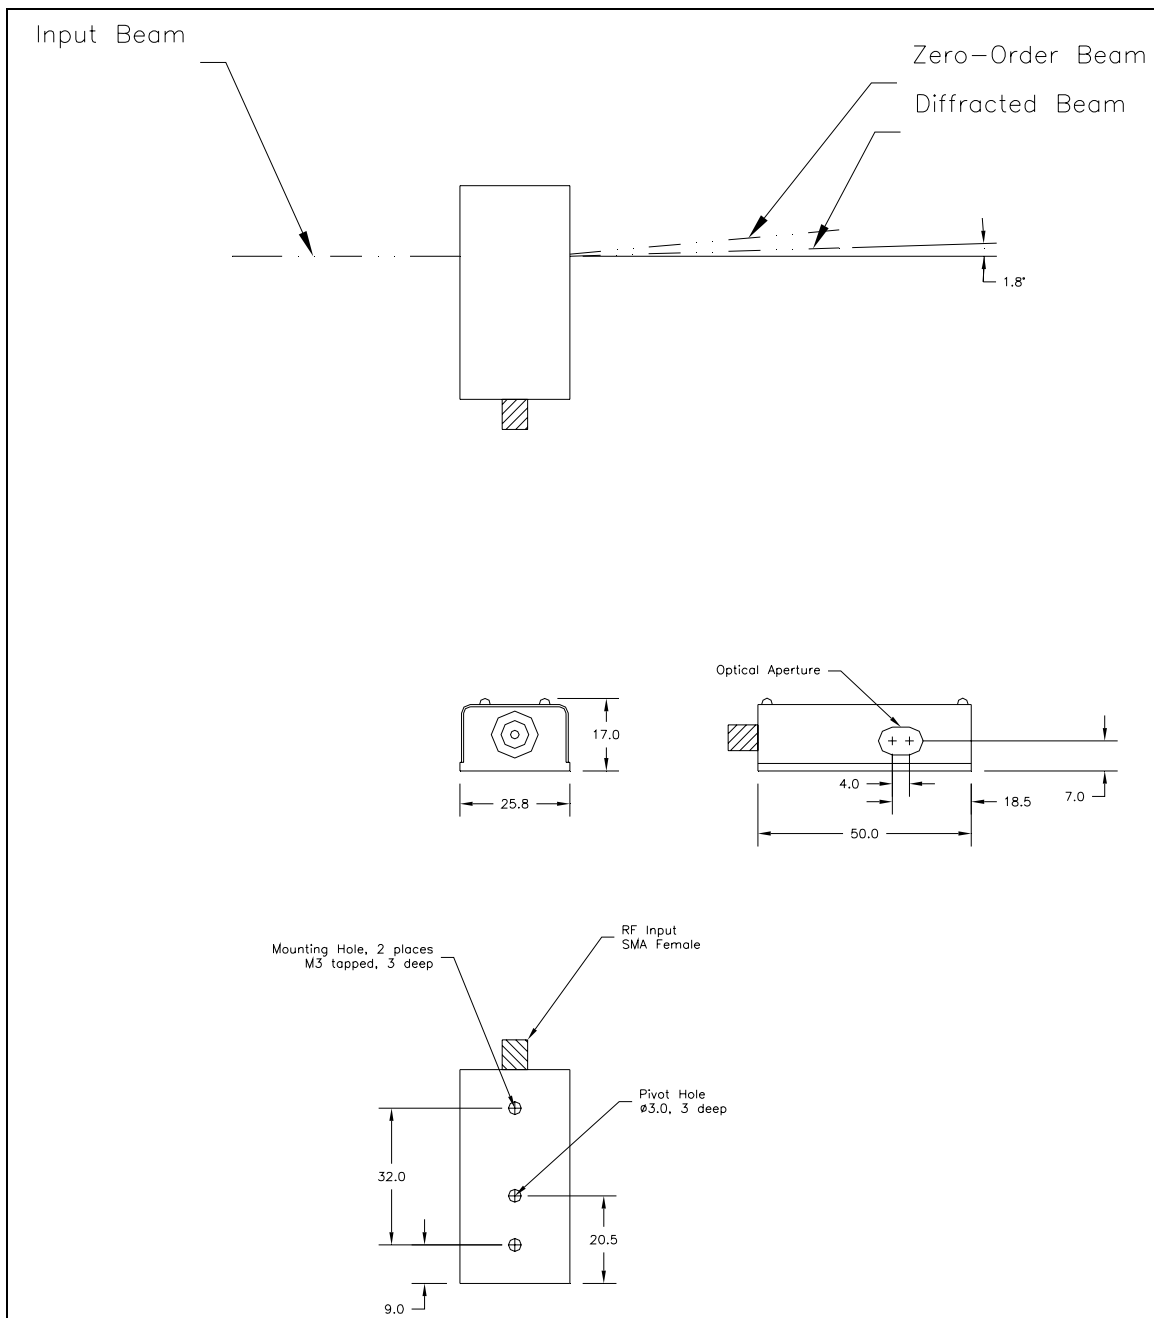

Tuning relation

