



# FLEXPOINT® Cross Hair Laser

## APPLICATIONS

- Measurement technology (illumination for light-slit method)
- Machine manufacturing industry (for display cutting edges)
- Medical systems (for positioning patients)

## FEATURES

- High optical performance
- Fan angles from 10° – 100°
- Laser can be optimized to working distance
- Ruggedized housing

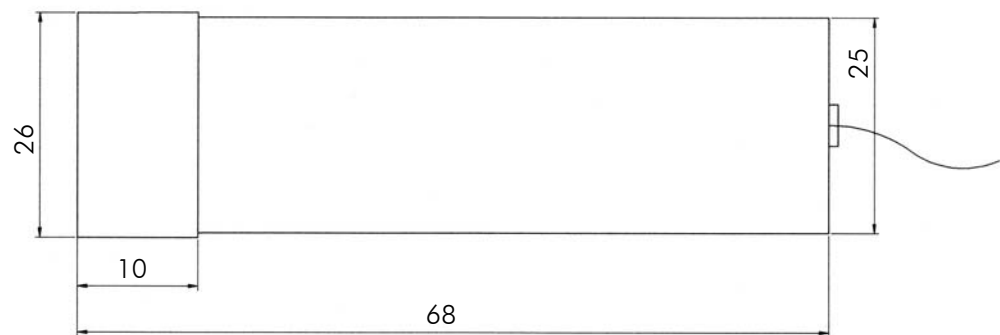

All dimensions in mm

## TECHNICAL DATA

Wavelength	635 nm – 905 nm
Optical power	depends on Laser diode type 1 ... 5 mW
Optics	line projection
Fan angle	10° - 100°
Input voltage	4,5 – 6 VDC; option 8 – 30 VDC reverse voltage protection
Power consumption	60 – 150 mA
Operating temperature range	0 – 40 °C typ.
Storage temperature range	-10 ... +60 °C
Specials	on request

09/06 / V1 / IF / blau / fp\_kreuzlaser\_e.doc



Page 1



光技術をサポートする  
**株式会社オプトサイエンス**  
<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング  
TEL:03(3356)1064 FAX:03(3356)3466 E-mail:info@optoscience.com  
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館  
TEL:06(6305)2064 FAX:06(6305)1030 E-mail:osk@optoscience.com  
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル  
TEL:052(569)6064 FAX:052(569)8064 E-mail:ngo@optoscience.com