

Air Spaced Polarizer

Originally designed to conform to stringent military specifications, SYNOPTICS' Air Spaced Polarizer is now being offered for commercial applications. The Air Spaced Polarizer is an alternative to calcite and Brewster-type polarizers which offers:

- High transmission (T_p)
- High contrast ratio (T_p / T_s)
- Excellent damage threshold
- Resistance to temperature / humidity extremes
- Minimal beam deviation
- Wide acceptance angle
- Low wavefront distortion

Air Spaced Polarizers exhibit higher transmission and better damage threshold than calcite polarizers and do not produce the unwanted beam displacement associated with Brewster-type polarizers.

The logical choice for high power polarization needs, SYNOPTICS' Air Spaced Polarizers are presently available for use at 1064, 1053 and 1047 nanometers.

NORTHROP GRUMMAN
Space Technology
SYNOPTICS





光技術をサポートする
株式会社オプトサイエンス
<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング
TEL: 03 (3356) 1064 FAX: 03 (3356) 3466 E-mail: info@optoscience.com
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館
TEL: 06 (6305) 2064 FAX: 06 (6305) 1030 E-mail: osk@optoscience.com
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル
TEL: 052 (569) 6064 FAX: 052 (569) 8064 E-mail: ngo@optoscience.com

Standard Specifications

	Type 1	Type 2	Type 3
Polarization transmittance, T_p	> 98.0%	> 97.5%	> 97.0%
Contrast ratio, T_p / T_s	> 500:1	> 500:1	> 500:1
Damage threshold @ 1064 nm, 20 ns pulse	500 MW / cm ²	500 MW / cm ²	300 MW / cm ²
Transmitted wavefront distortion @ 633 nm	< 1 / 8 λ	< 1 / 8 λ	< 1 / 4 λ
Transmitted beam deviation	< 2 arc minutes	< 3 arc minutes	< 3 arc minutes
Reflected beam deviation	< 4 arc minutes	< 4 arc minutes	< 4 arc minutes
Acceptance angle	+0.5° to -0.5°	+0.5° to -0.5°	+0.5° to -0.5°
Surface quality, scratch-dig	20 - 10	40 - 15	60 - 20
Surface reflectivity	< 0.15%	< 0.25%	< 0.25%
Operating temperature range	-40 °C to +70 °C	-40 °C to +70 °C	-40 °C to +70 °C
Standard wavelength	1064 nm	1064 nm	1064 nm

P Component Transmittance vs. Temperature

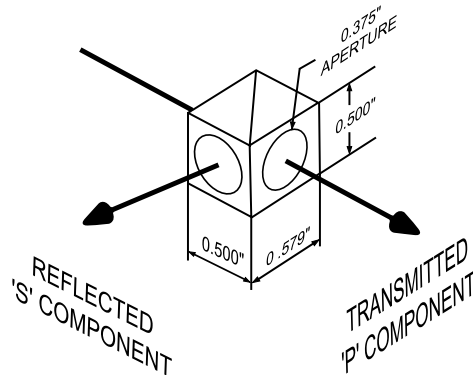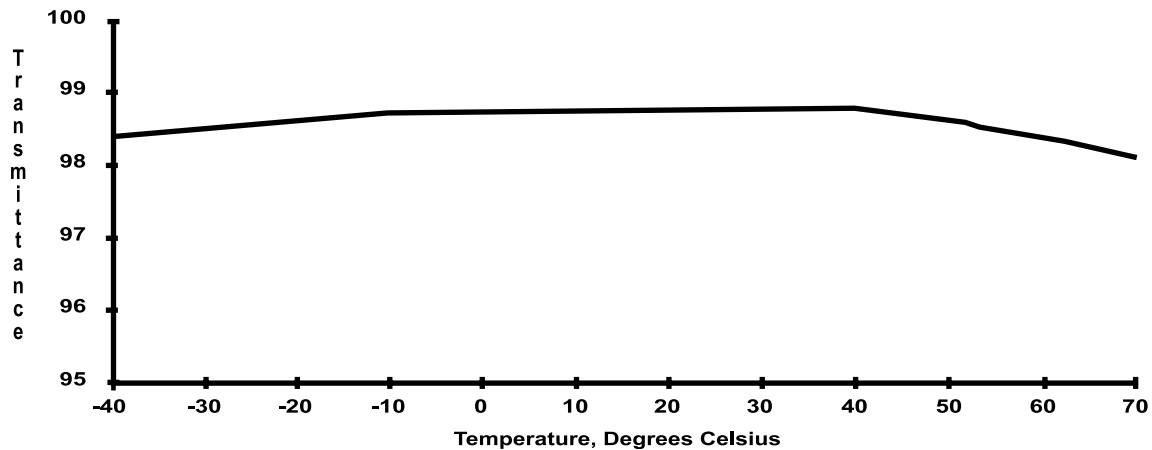

Specifications and information are subject to change without prior notice.
 © 2003 Northrop Grumman Corporation MSG1034 02/02

NORTHROP GRUMMAN

Space Technology

SYNOPTICS

704-588-2340 • FAX 704-588-2516
 1201 Continental Blvd., Charlotte, NC 28273
 email: st.synoptics.sales@ngc.com