



# 50 Watt 976nm PowerPac-S Fiber Coupled Laser Module PPS-976-250



- 50 watts fiber output from a single 200/220 $\mu$ m, 0.22NA fiber
- 20cm x 10cm footprint
- Hermetically sealed lasers
- Air-cooled or water-cooled
- Optional red aiming beam

### Specifications (at 25°C):

Combined output power	>50W
Center wavelength	976 $\pm$ 5nm
Spectral width (FWHM)	< 7nm
Threshold current	< 700mA
Operating current	< 115A
Forward voltage	< 15V

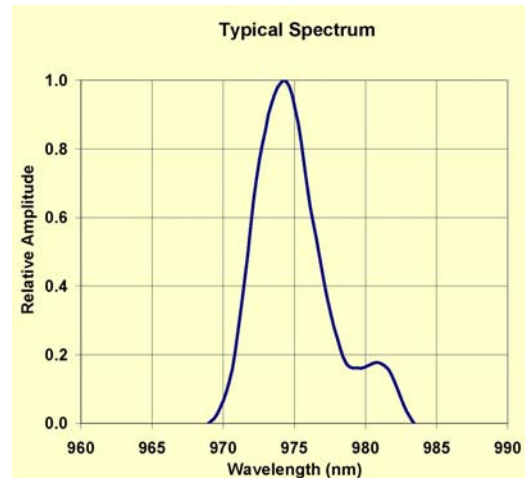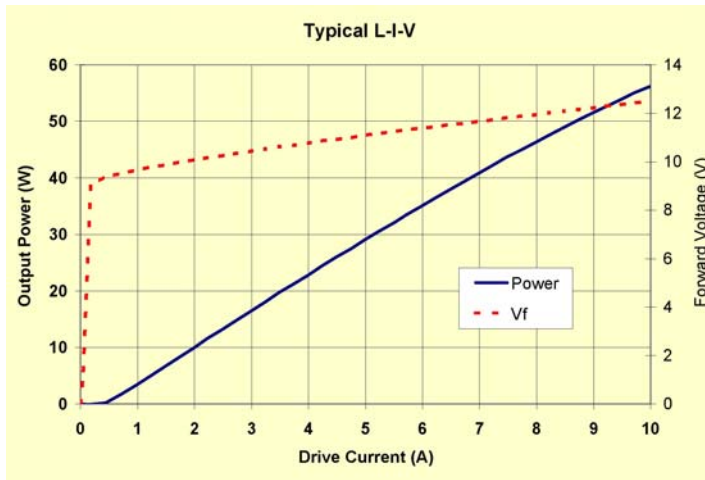

This Product is sold solely as a component for incorporation into other equipment. The purchaser assumes responsibility to comply with US 21 CFR 1040 SUBCHAPTER J with regard to the use of this laser and its introduction into commerce.

**SHEAUMANN**



光技術をサポートする  
**株式会社オプトサイエンス**

<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング  
TEL:03(3356)1064 FAX:03(3356)3466 E-mail:info@optoscience.com  
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館  
TEL:06(6305)2064 FAX:06(6305)1030 E-mail:osk@optoscience.com  
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル  
TEL:052(569)6064 FAX:052(569)8064 E-mail:ngo@optoscience.com