

25 Watt 808nm PowerPac-S Fiber Coupled Laser Module



- 25 watts fiber output from a single 200 μ m, 0.22NA fiber
- About the size of your foot
- Hermetically sealed lasers
- Air-cooled or water-cooled




Wavelength tolerances

PPS-808-225 - 808 \pm 10nm

PPS-806-401 - 805-808nm

Specifications (at 25°C):

Output power	>25W
Spectral width	< 4nm FWHM
Threshold current	< 700mA
Operating current	< 5A
Forward voltage	< 16V
Operating temperature	15 - 55°C

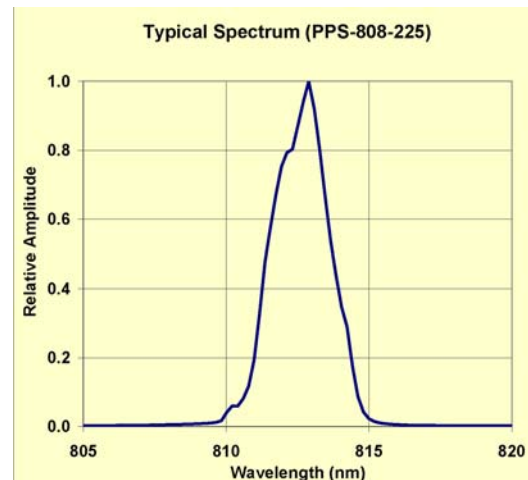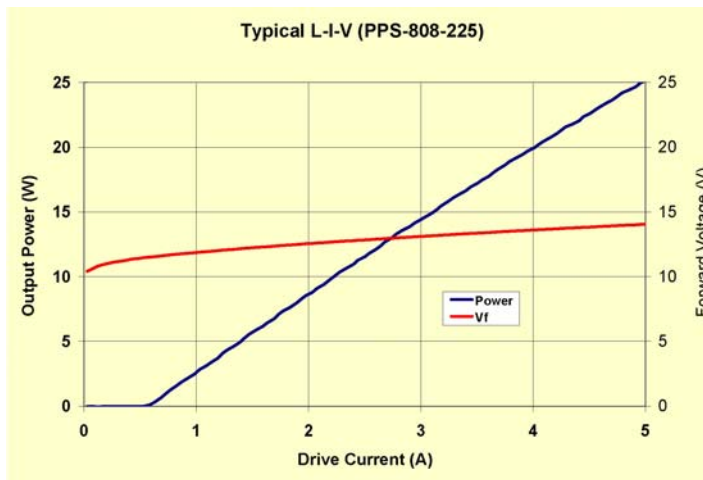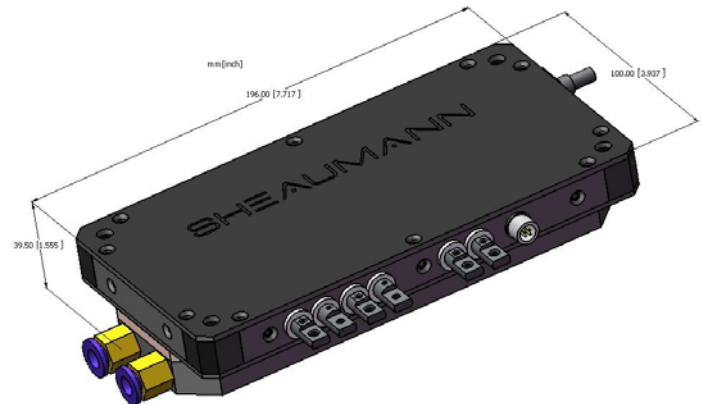

This Product is sold solely as a component for incorporation into other equipment. The purchaser assumes responsibility to comply with US 21 CFR 1040 SUBCHAPTER J with regard to the use of this laser and its introduction into commerce.

SHEAUMANN



光技術をサポートする
株式会社オプトサイエンス

<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング
TEL:03(3356)1064 FAX:03(3356)3466 E-mail:info@optoscience.com
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館
TEL:06(6305)2064 FAX:06(6305)1030 E-mail:osk@optoscience.com
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル
TEL:052(569)6064 FAX:052(569)8064 E-mail:ngo@optoscience.com