





# 1W 50 $\mu$ m 980nm SheauPac Fiber Coupled Laser Module SP-980-901

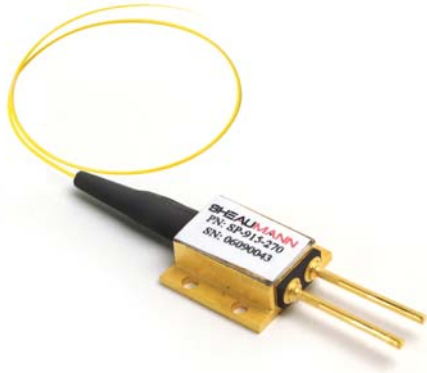

- 1 watt fiber output from a single emitter
- 0.12NA, 50/125 $\mu$ m fiber
- Various fiber jacket and connector options
- Electrically isolated case
- Hermetically sealed
- Similar in size to a U.S. dime
- Power supply, test software, and copper air-cooled heat sink available separately

## Specifications (at 25°C)

Center wavelength	980 $\pm$ 3nm
Output power	> 1W
Spectral width	< 5nm FWHM
Threshold current	< 250mA
Operating current	< 2.5A
Forward voltage	< 2.1V
Operating temperature	15 - 55°C

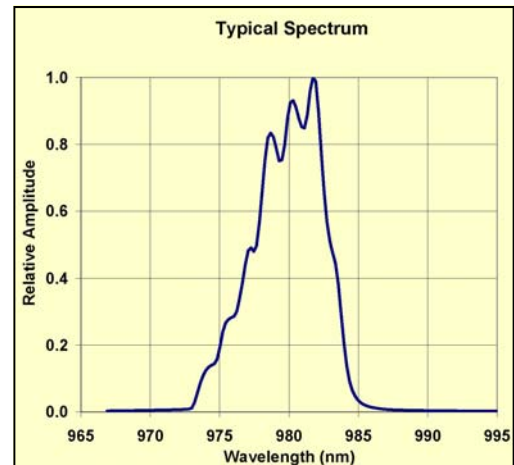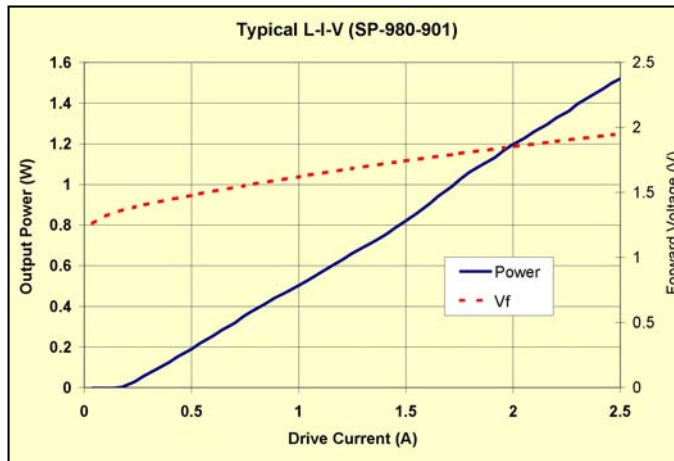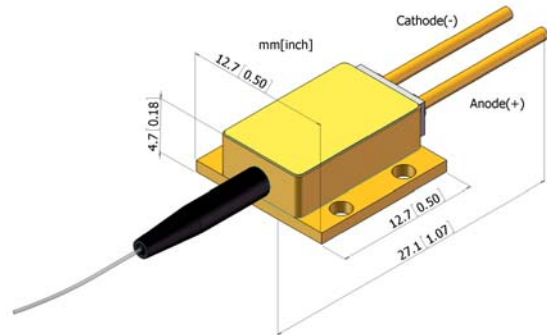

This Product is sold solely as a component for incorporation into other equipment. The purchaser assumes responsibility to comply with US 21 CFR 1040 SUBCHAPTER J with regard to the use of this laser and its introduction into commerce.

**SHEAUMANN**



光技術をサポートする  
**株式会社オプトサイエンス**

<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング  
TEL: 03 (3356) 1064 FAX: 03 (3356) 3466 E-mail: info@optoscience.com  
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館  
TEL: 06 (6305) 2064 FAX: 06 (6305) 1030 E-mail: osk@optoscience.com  
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル  
TEL: 052 (569) 6064 FAX: 052 (569) 8064 E-mail: ngo@optoscience.com