



Gooch & Housego

Multimode Power Combiner



G&H's TFB series Power Combiners provide an all-fibre high efficiency means of combining light from several multimode sources into one fibre.

Fabricated using G&H proprietary controlled fusion process the combiner enables high coupling efficiency over a wide wavelength range.

Available in standard 3x1 and 7x1 configurations, G&H power combiners can be fabricated from a range of industry standard multimode fibres allowing ease of splicing to commercially available laser diodes.

Custom fibre and port configurations are available on request.

Please contact the sales team for further information.

Key Features:

- All fibre construction
- High Coupling Efficiency
- High Power Design
- Custom configurations available

Applications:

- Cladding pumped fibre lasers
- Medical
- Industrial
- Defence

As part of our policy of continuous product improvement we reserve the right to change specifications at any time
PEC 0125 Issue 2



光技術をサポートする
株式会社オプトサイエンス
<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング
TEL:03(3356)1064 FAX:03(3356)3466 E-mail:info@optoscience.com
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館
TEL:06(6305)2064 FAX:06(6305)1030 E-mail:osk@optoscience.com
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル
TEL:052(569)6064 FAX:052(569)8064 E-mail:ngo@optoscience.com


Optical Specifications₁

Parameter	Specification		Unit
Pump Input Fibre NA	0.15	0.22	-
Pump Input Wavelength	900 to 1000		nm
Pump (MM) Transmission Efficiency ₂	≥ 90 (Typ > 95)	≥ 90	%
Return Loss/Directivity	> 40		dB
<hr/>			
Operating Temperature	-5 to +75		°C
Storage Temperature	-40 to +85		°C

1. All specifications are for operation at room temperature.
 2. Transmission efficiency based 7x1 with 125µm / 0.45NA output fibre and 0.5m pigtails. Reported at 975nm as standard.

Ordering Code Information

Example: TFB-MMM711A70 (7x1 Tapered Fibre Bundle with seven 105/125µm 0.15NA pump inputs, one 125µm 0.45NA output in high power housing with 0.5m pigtails).

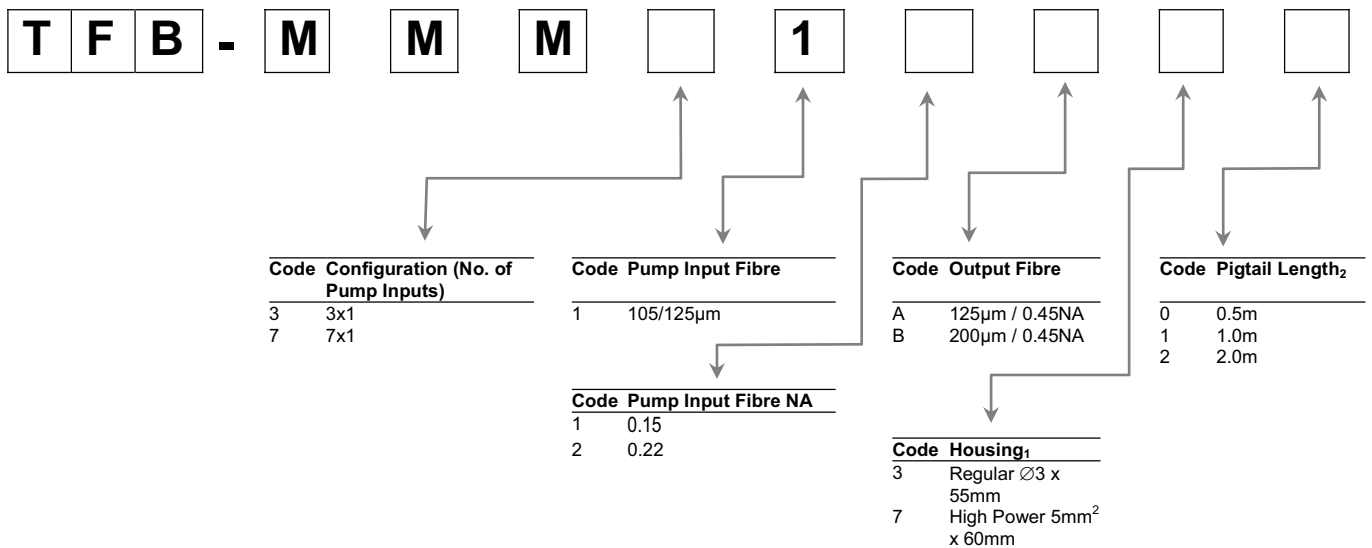

1. Maximum housing lengths. Adequate heat-sinking is required for high power operation. For more information please contact the G&H sales team.
 2. Minimum pigtail lengths.

As part of our policy of continuous product improvement we reserve the right to change specifications at any time
 PEC 0125 Issue 2

