

# Gooch & Housego

## PM Combiner



The G&H PM Combiner enables the efficient combination of two orthogonally polarised sources of light such that they are output through the same, single fibre output.

In optical amplifiers this provides a doubling of pump power whilst ensuring pump redundancy should a pump failure occur.

Applications include high power optical amplifiers and undersea systems. All ports consist of polarisation maintaining fibre.

### Key Features:

- Low insertion loss
- High power handling
- 9xx, 10xx, 14xx and 15xx variants

### Applications:

- Erbium doped fibre amplifiers (EDFAs)
- Raman amplifiers
- Undersea systems
- Coherent optical communications

Contact: [sales@goochandhousego.com](mailto:sales@goochandhousego.com)

[www.goochandhousego.com](http://www.goochandhousego.com)

As part of our policy of continuous product improvement we reserve the right to change specifications at any time

PEC 0107 Issue 2



光技術をサポートする

株式会社オプトサイエンス

<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング  
TEL: 03 (3356) 1064 FAX: 03 (3356) 3466 E-mail: [info@optoscience.com](mailto:info@optoscience.com)  
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館  
TEL: 06 (6305) 2064 FAX: 06 (6305) 1030 E-mail: [osk@optoscience.com](mailto:osk@optoscience.com)  
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル  
TEL: 052 (569) 6064 FAX: 052 (569) 8064 E-mail: [ngo@optoscience.com](mailto:ngo@optoscience.com)

## Optical Specifications

Parameter		9xx	10xx	14xx	15xx	16xx
Range of available centre wavelengths <sub>1,2</sub>		915-999nm	1000-1099nm	1400 – 1499nm	1500-1599nm	1600-1650nm
<b>Insertion Loss (fast axis)<sub>3</sub></b>						
Grade M	Max	0.40dB	0.40dB	0.40dB	0.50dB	0.50dB
Grade W	Max	0.60dB	0.60dB	0.60dB	0.70dB	0.70dB
Housing Option		3	3	3	3	3
Dimensions (φ x L) for 1x2 and 2x2		3.0 x 71mm				
<b>Insertion Loss (slow axis)<sub>3</sub></b>						
Grade M	Max	0.35dB				
Grade W	Max	0.40dB				
Return Loss / Directivity	Min	50dB				
TDL	Typ	0.15dB				
Pigtail tensile load	Max	5N				
Optical power handling	Max	4W				
Fibre type		All ports PM fibre				
Pigtail		Primary coated fibre				
Operating temperature range		-5 to 75°C				
Storage temperature range		-40 to 85 °C				


1. The centre wavelength may be selected from within the operating wavelength ranges supplied.
2. Other wavelengths are available. Please contact the sales office.
3. Insertion loss at centre wavelength (not including TDL or connector losses).

## Configuration



## Ordering Code Information

**Example: FFP-SM3245F10** (PM Combiner, Grade M, regular housing, 2x2, channel centre = 1445nm, telecoms PM fibre 250µm buffer, 1m pigtail, no connector)

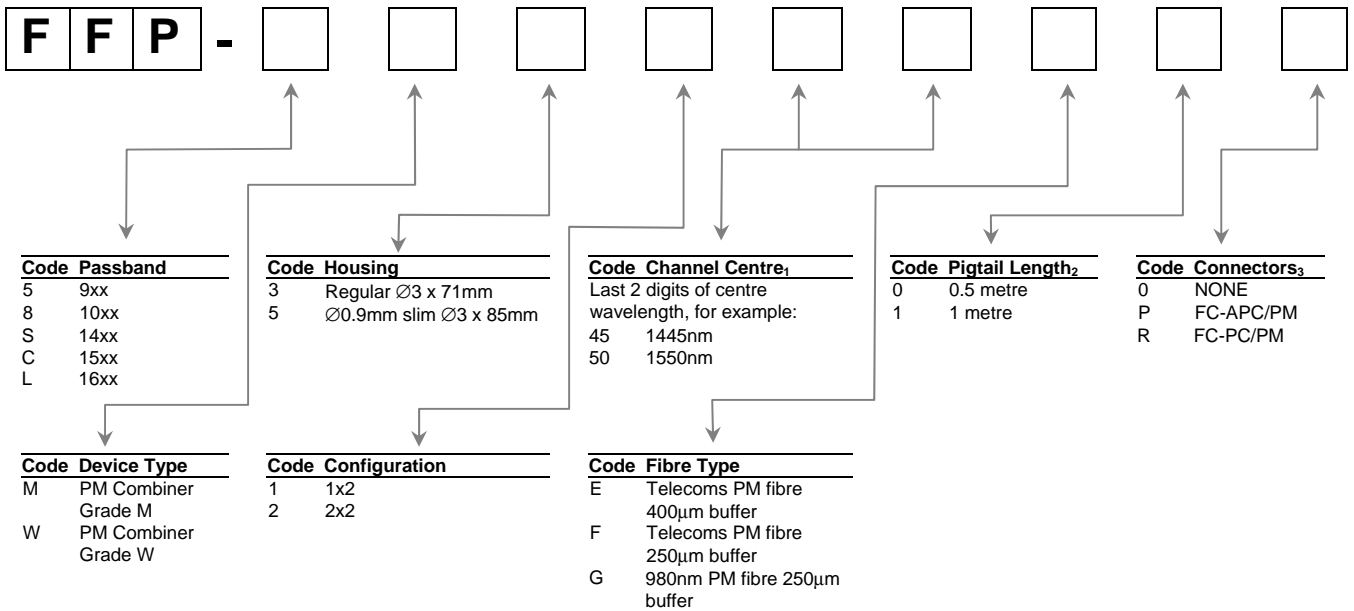

1. Channel centre must be within the wavelength ranges shown in the Optical Specifications table.
2. Minimum pigtail length. Other pigtail lengths are available on request.
3. Insertion loss in specification table does not include connector loss. Other connectors available on request.

PM Products are manufactured using 250µm PANDA PM fibre, 400µm PANDA PM fibre available at wavelengths higher than 1400nm.