



A Donaldson Company

A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY

# AD 500 iQ

LASER

Last Updated on 29.08.2018



Affordable high performance laser fume extraction system for applications in the laser marking, coding and engraving industries.

BOFA's AD 500 iQ mid to high end laser fume extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance has been further enhanced with the inclusion of several features including BOFA's acclaimed iQ Operating System, making the AD 500 iQ one of the most advanced systems available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

More information about the [Intelligent \(iQ\) Operating System](#).

## Technology



Intelligent (iQ) operating system



DeepPleat DUO pre filter



HEPA filter



Automatic flow control (AFC) technology



Reverse flow air (RFA) technology



Advanced carbon filter (ACF) technology



Patented technology



ProTECT service plan



SureCHECK quality standard

## Key features of the AD 500 iQ

iQ Operating system  
Standard

Reverse flow air filter technology  
Standard

High airflow and pressure rates  
Standard

DeepPleat DUO pre filter  
Standard

Contact BOFA at <https://bofainternational.com/en/contact/>

<https://bofainternational.com/en/portal/datasheets/ad-500-iq/>



**Combined HEPA/Gas filter incorporating ACF technology**

Standard

**Real time airflow reading**

Standard

**High contrast display**

Standard

**Remote diagnostics via USB**

Standard

**VOC gas sensor (Volatile Organic Compound)**

Optional

**Filter change / System fail signal**

Optional

**On-board compressor**

Optional

**Automatic flow control system**

Standard

**Independent filter condition monitoring, display and warnings**

Standard

**'Run safe' operation**

Standard

**Filters with long life and low replacement cost**

Standard

**Remote stop / start interface**

Optional

**Interfacing with host laser**

Optional

**Optional filter medias**

Optional

## Technical specification

1. iQ Display

2. On / off switch

3. Power cable

4. Signal / interface cable

5. Castors

6. Door hinge

7. Hose inlet connection -  
125mm


8. Exhaust outlet

9. Motor cooling inlet



10. Door latch

11. Motor cooling outlet

12. Standby button

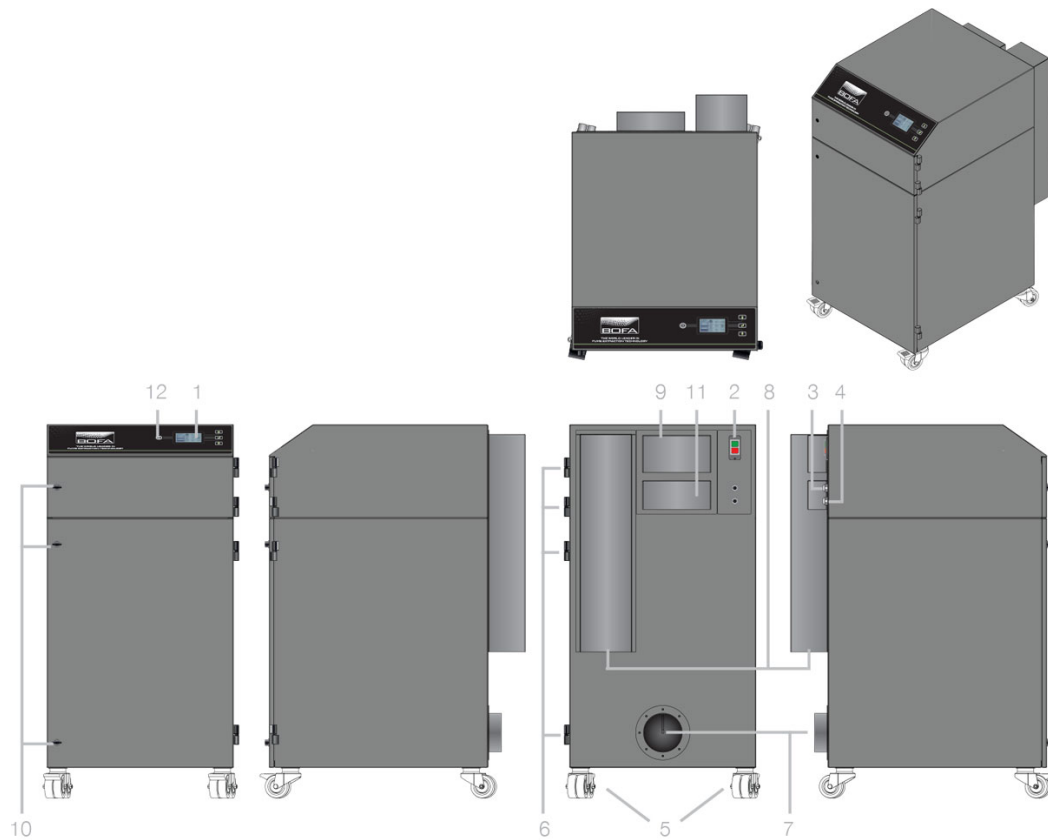

## Airflow through filters

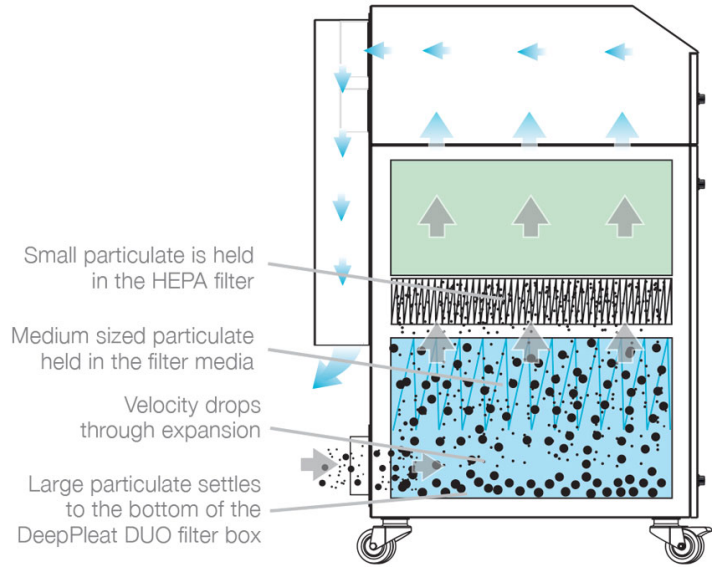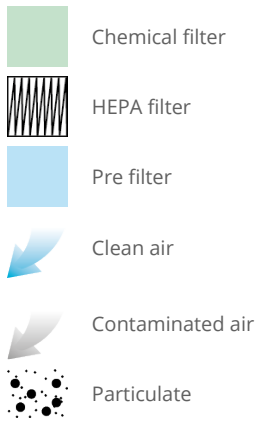

### Technical data

	EU	US
Dimensions (HxWxD)	1205 x 615 x 790mm	47.44 x 24.21 x 31.10"
Cabinet construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel
Airflow / Pressure	550m <sup>3</sup> /hr / 100mbar	324cfm / 100mbar
Electrical data	230v 1ph 50/60Hz Full load current: 9.5 amps / 1.1kw	115v 60/50Hz Full load current: 14.8 amps / 1.1kw
Noise level	< 60dBA (at typical operating speed)	< 60dBA (at typical operating speed)
Weight	146kg	322lbs
Approvals	CE	cUL, UL

### DeepPleat DUO pre filter specifications

Surface media area	30m <sup>2</sup> approx (322.8ft <sup>2</sup> )
Filter media	Glass fibre
Filter media construction	Maxi pleat construction with webbing spacers
Filter housing	Zintec mild steel
Filter efficiency	95% @ 0.9 microns
Inlet size	125mm (0.41ft)
Dropout chamber size	58 litres
Filter media pleat size	200mm (0.65 ft)

### Combined HEPA/Gas filter specifications

Surface media area	7.5m <sup>2</sup> approx (80.7 ft <sup>2</sup> )
HEPA filter media	Glass Fibre
HEPA media construction	Maxi pleat construction with Webbing Spacers
Filter housing	Zintec mild steel

## Combined HEPA/Gas filter specifications

Treated activated carbon	34kgs (74.8 lbs)
Filter efficiency	99.997% @ 0.3 microns

## Unit part numbers

Model	Voltage	Part no.	24V Stop / Start	Filter change / System failure signal	VOC monitoring	On-board compressor
AD 500 iQ powder coated	230V	L0662	A2001	A2002	A2003	A2007
AD 500 iQ powder coated	115V	L0661	A2001	A2002	A2003	A2007
AD 500 iQ stainless steel	230V	L0672	A2001	A2002	A2003	A2007
AD 500 iQ stainless steel	115V	L0671	A2001	A2002	A2003	A2007

## Replacement filter part numbers

Model	DeepPleat DUO pre filter	Combined filter
AD 500 iQ	A1030222	A1030297

## Other languages

AD 500 iQ  
[German](#)

AD 500 iQ  
[French](#)

*Datasheet correct at time of publishing.*

*Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.*

*Think before you print! Please consider the environment before printing this document.*



光技術をサポートする  
**株式会社オプトサイエンス**

<https://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング TEL:03-3356-1064  
大阪営業所 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館 TEL:06-6305-2064  
名古屋営業所 〒450-0002 名古屋市市中村区名駅2-37-21 東海ソフトビル TEL:052-569-6064

E-mail : [info@optoscience.com](mailto:info@optoscience.com)