




Gooch & Housego

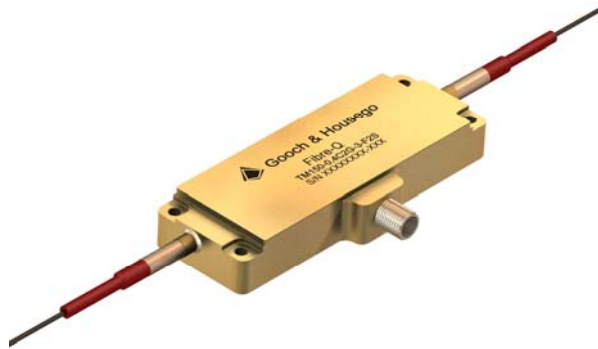

Fibre-Q Fibre-Coupled Acousto-Optic Modulator

T-M150-0.4C2G-3-F2S

Gooch & Housego specialise in providing optical components for high power fibre laser and amplifier systems. In-house control of critical manufacturing processes, from crystalline material selection and orientation, cutting, polishing and AR coating through to fibre coupling, ensure our components are of the highest optical quality.

The 'Fibre-Q' Acousto-Optic Modulator is designed for use in pulsed fibre laser amplifier systems. Giving optimum performance in demanding applications, such as material processing.

In addition to the standard product shown, custom configurations are available for specialised applications.

Key Features:

- Low insertion loss
- Compact, low profile package
- Rugged hermetic design
- Stable performance
- Custom configurations available

Applications:

- Fibre laser
- Fibre amplifier
- Pulse picker

General Specifications

Interaction material:	Tellurium Dioxide
Wavelength:	1060 - 1090nm (other wavelengths available on request)
Average optical power handling:	5W
Peak (pulse) optical power handling:	30kW typical (dependent on pulse width)
Insertion loss:	< 2dB
Return loss:	> 40dB (>50dB version available on request)
Extinction ratio (1 st order on / off)	> 50dB
Rise-time / fall-time:	30ns
Frequency:	150MHz
VSWR:	< 1.2:1
Input impedance:	50Ω
RF power:	< 2.0W
Frequency shift:	150MHz (up-shift)
Fibre type:	Hi1060 (900µm sleeving, 1.5m length)
Fibre termination:	Bare fibre

Recommended RF driver: MHC150-2AC-A1-TQ2
または、A36150-XX (A36シリーズ)



光技術をサポートする
株式会社オプトサイエンス


<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング
TEL:03(3356)1064 FAX:03(3356)3466 E-mail:info@optoscience.com
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館
TEL:06(6305)2064 FAX:06(6305)1030 E-mail:osk@optoscience.com
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル
TEL:052(569)6064 FAX:052(569)8064 E-mail:ngo@optoscience.com

Ordering Code:

Explanation: T-M150-0.4C2G-3-F2S (Modulator, 150MHz, 0.4mm active aperture, compressional mode, Tellurium Dioxide, 1064nm, SMA female bulk head connector, 2 fibre, single mode (Hi1060))

T	-	M	1	5	0	-	0	.	4	C	2	G	-	3	-	F	2	S
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

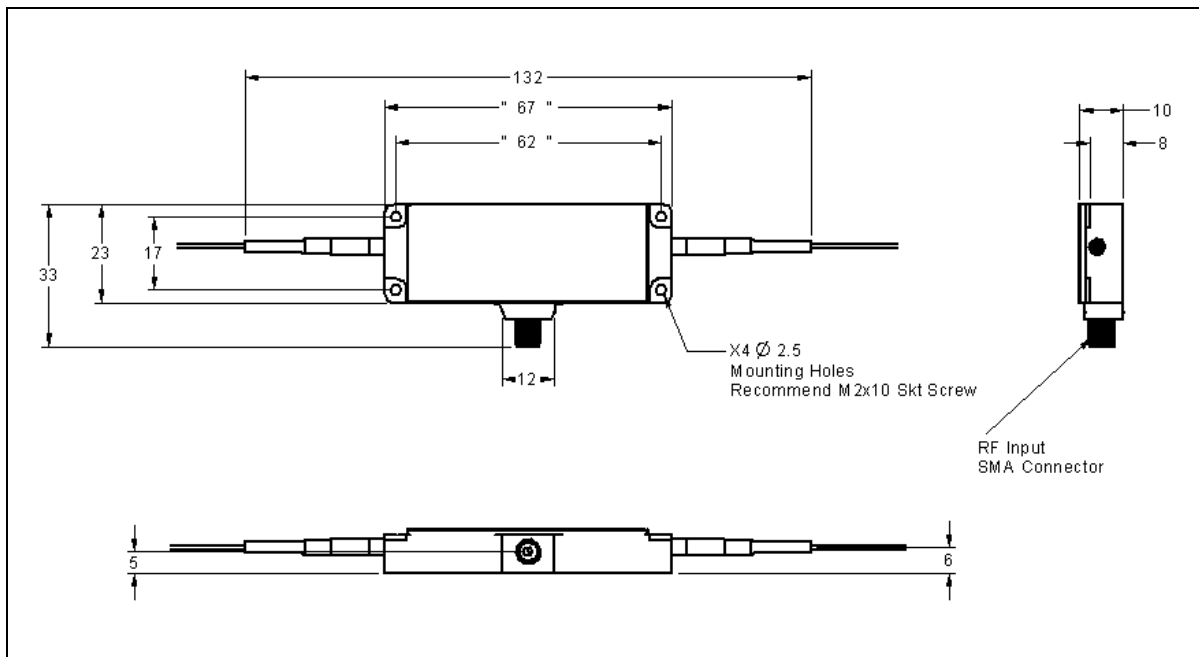

Other Gooch & Housego products which may be of interest:


Our extensive range of components for fibre laser applications includes:

- Isolators
- High power multimode combiners
- Combiners with all types of signal feedthrough fibre
- Ultra low ratio tap couplers
- WDMs for combining signals with red pointer lasers

Please send your specifications to sales@goochandhousego.com or contact your local sales representative to discuss your requirements.



Gooch & Housego

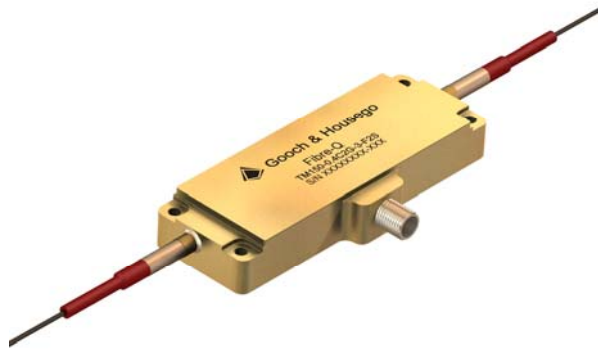

PM Fibre-Q

Polarisation Maintaining Fibre-Coupled Acousto-Optic Modulator

T-M150-0.4C2G-3-F2P

Gooch & Housego specialise in providing optical components for high power fibre laser and amplifier systems. In-house control of critical manufacturing processes, from crystalline material selection and orientation, cutting, polishing and AR coating through to fibre coupling, ensure our components are of the highest optical quality.

The 'Fibre-Q' Acousto-Optic Modulator is designed for use in pulsed fibre laser amplifier systems. Giving optimum performance in demanding applications, such as material processing.

In addition to the standard product shown, custom configurations are available for specialised applications.

Key Features:

- Low insertion loss
- Compact, low profile package
- Rugged hermetic design
- Stable performance
- Custom configurations available

Applications:

- Fibre laser
- Fibre amplifier
- Pulse picker

General Specifications

Interaction material:	Tellurium Dioxide
Wavelength:	1060 - 1090nm (other wavelengths available on request)
Average optical power handling:	5W
Peak (pulse) optical power handling:	30kW typical (dependent on pulse width)
Insertion loss:	< 2.5dB (< 2dB typical)
Return loss:	> 40dB (> 50dB version available on request)
Extinction ratio (1 st order on / off)	> 50dB
Polarisation extinction ratio (PER):	> 18db (> 20dB typical)
Rise-time / fall-time:	30ns
Frequency:	150MHz
VSWR:	< 1.2:1
Input impedance:	50Ω
RF power:	< 2.0W
Frequency shift:	150MHz (up-shift)
Fibre type:	Nufern PM980HP (900µm sleeving, 1.5m length) Other fibre manufactures on request
Fibre termination:	Bare fibre
Recommended RF driver:	MHC150-2AC-A1-TQ2 または、A36150-XX (A36シリーズ)



光技術をサポートする
株式会社オプトサイエンス


<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング
TEL:03(3356)1064 FAX:03(3356)3466 E-mail: info@optoscience.com
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館
TEL:06(6305)2064 FAX:06(6305)1030 E-mail: osk@optoscience.com
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル
TEL:052(569)6064 FAX:052(569)8064 E-mail: ngo@optoscience.com

Ordering Code:

Explanation: T-M150-0.4C2G-3-F2P (Modulator, 150MHz, 0.4mm active aperture, compressional mode, Tellurium Dioxide, 1064nm, SMA female bulk head connector, 2 fibre, polarisation maintaining (PM980HP))

T	-	M	1	5	0	-	0	.	4	C	2	G	-	3	-	F	2	P
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

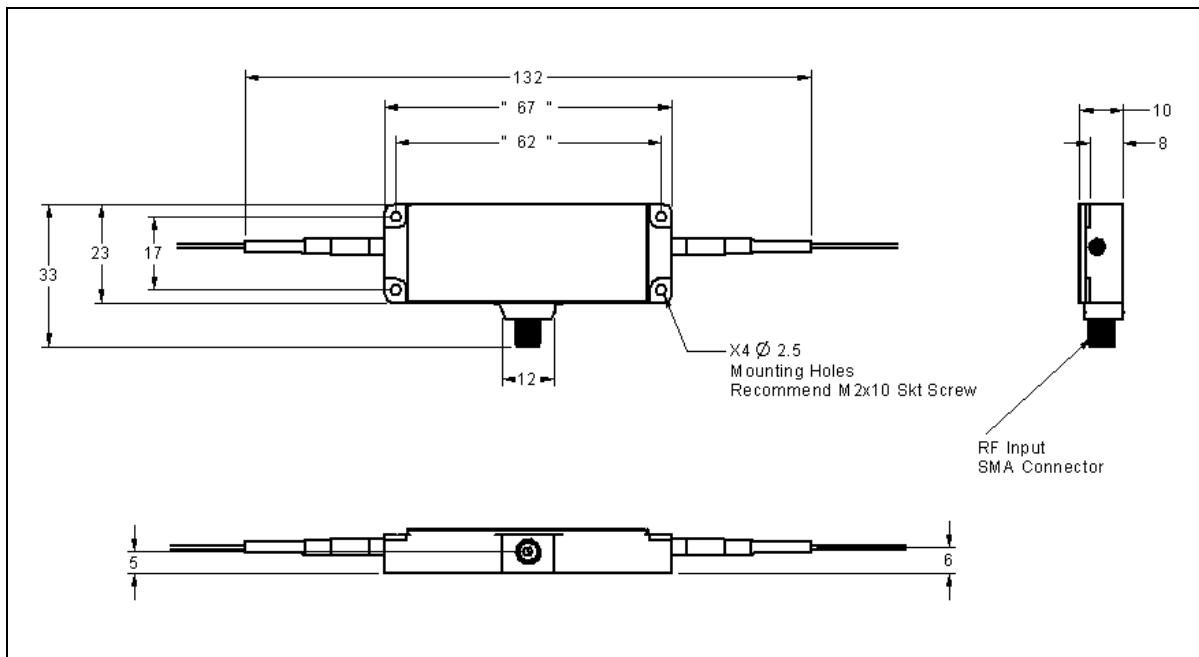

Other Gooch & Housego products which may be of interest:

Our extensive range of components for fibre laser applications includes:

- Isolators
- High power multimode combiners
- Combiners with all types of signal feedthrough fibre
- Ultra low ratio tap couplers
- WDMs for combining signals with red pointer lasers

Please send your specifications to sales@goochandhousego.com or contact your local sales representative to discuss your requirements.