




O Band (1310 nm) Transmission Grating T-1200-1310

Features:

- Ultra-High Diffraction Efficiency.
- Low Polarization Sensitivity.
- Excellent Groove Uniformity.
- Only fused Silica and robust dielectrics are used, no polymers.
- High optical power handling.
- Extreme environmental stability. Telcordia qualified.
- Each grating is a master: low light scatter, no ghosting.
- Very competitive pricing.
- Strict quality control. LightSmyth is ISO 9001:2008 certified.

Applications:

- 1310 nm Datacom
- Spectroscopy
- Remote Sensing
- OEM

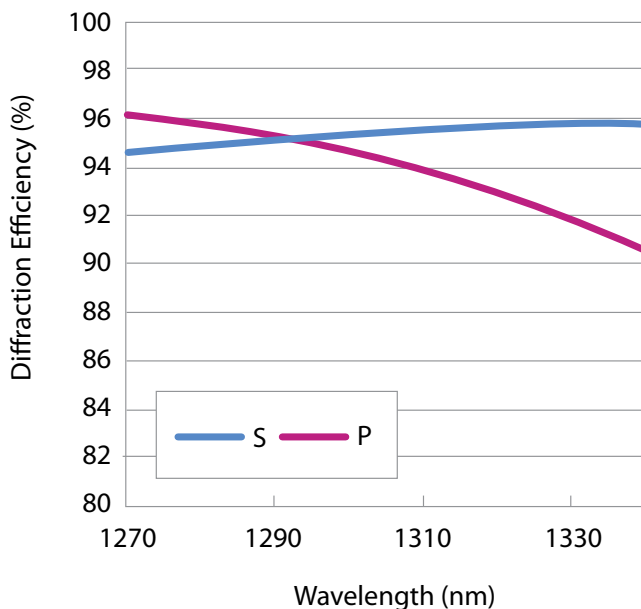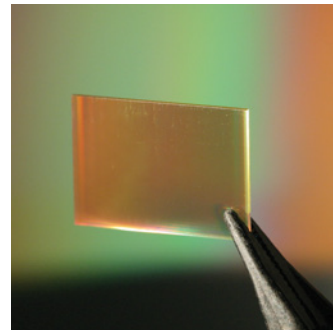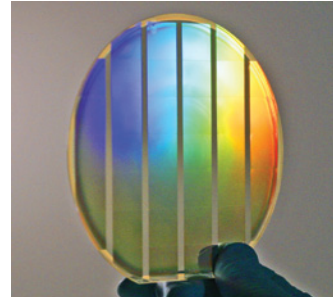

LightSmyth Technologies' transmission gratings are fabricated on fused silica substrates and robust dielectric films by state-of-the-art projection photolithography and reactive ion etch. These high fidelity semiconductor fabrication methods enable precise realization of sophisticated proprietary grating designs that provide diffraction efficiency close to 100% and line spacing control to 1 part per million.

No other grating technology is capable of achieving this degree of performance combined with the cost effectiveness and reproducibility afforded by semiconductor volume fabrication technology.

Left: Simulated diffraction efficiency of 1200 lines/mm Datacom Transmission Grating.

O Band (1310 nm) Transmission Grating

T-1200-1310

Optical		
Description	Value	Units
Line Density	1201.2	Lines/mm
Line Density Uniformity	± 0.001	Lines/mm
Angle of Incidence (AOI) ¹	52 ± 1	°
Wavelength Range	1310 ± 35	nm
Optimal polarization ²	Any	
Diffraction Efficiency ³	>90	%

Notes: ¹ Optical grating performance will remain substantially similar over a 5° variation in angle of incidence.

² p-polarization: electric field vector is perpendicular to the grating lines; s-polarization is orthogonal to p.

³ Worst case in the operational wavelength range for either polarization.

Mechanical	
Dimension tolerances	± 0.2 for grating size and width
Substrate Thickness	0.675 ± 0.050 mm
Material	Fused silica, dielectric layers
Scratch/Dig ⁴	60/40 standard, 40/20 and 20/10 custom

Note: ⁴ As per MIL-PRF-1380B in the clear aperture; no requirements outside of the clear aperture.


Substrate dimension options				
Part Number	Substrate width, mm ⁵	Substrate height, mm ⁵	Clear aperture width, mm ⁶	Clear aperture height, mm ⁶
T-1200-1310	14.8	9.8	13.8	8.8
Custom dimensions	Available – please call.			

Notes: ⁵ Width is perpendicular to grating grooves, height is parallel to the grating grooves.

⁶ Clear aperture is centered on the substrate.

Typical Optical Layout

The transmission grating is designed to operate in Littrow configuration at band center, where the angle of incidence and diffraction are the same for the central operational wavelength. Light is dispersed in the plane perpendicular to the grooves.

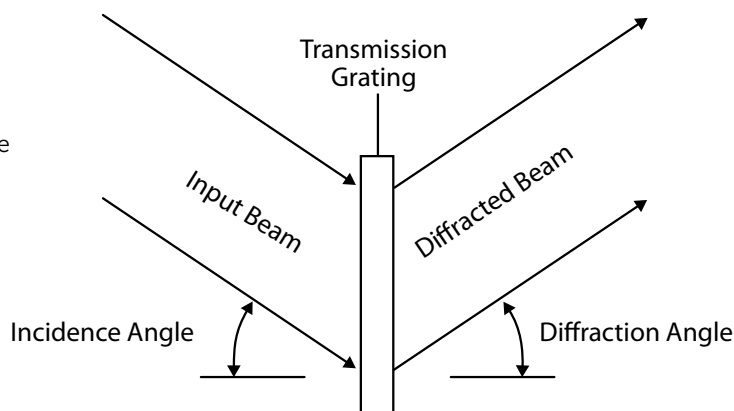

光技術をサポートする

株式会社オプトサイエンス

<https://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング TEL:03-3356-1064

大阪営業所 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館 TEL:06-6305-2064

名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル TEL:052-569-6064

E-mail : info@optoscience.com

LightSmyth
Technologies a Finisar Company

LightSmyth Technologies • www.LightSmyth.com • Tel + 1-541-431-0026

© 2015 LightSmyth Technologies. All rights reserved. LightSmyth is a pending trademark of Finisar Corporation. Features and specifications are subject to change without notice. 01/15