




## High Efficiency Telecom Transmission Gratings T-940L Series

### Features:

- Ultra-High Diffraction Efficiency.
- Very Low Polarization Sensitivity.
- Excellent Feature Fidelity and Groove Uniformity.
- Only fused Silica and robust dielectrics are used, no polymers.
- Extreme environmental stability. Telcordia qualified.
- Each grating is a master: low light scatter, no ghosting.
- Very competitive pricing.
- Strict quality control. LightSmyth is ISO 9001:2008 certified.

### Applications:

- Optical telecommunications (ROADM, WSS, WDM MUX/DEMUX)
- Pulse compression
- Spectral beam combining
- Remote optical sensors and spectroscopy

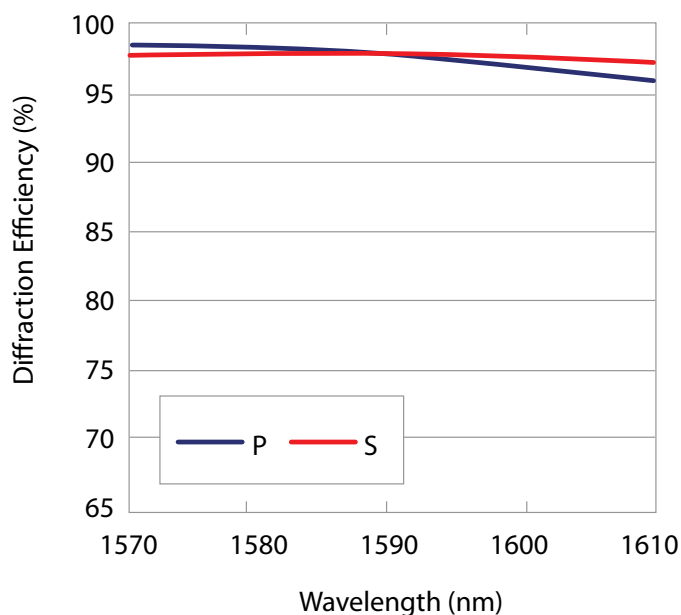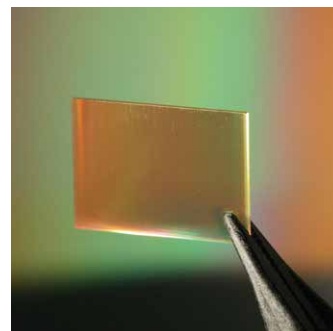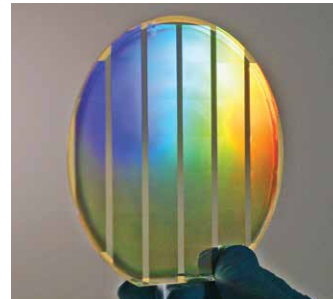

LightSmyth Technologies' transmission gratings are fabricated on fused silica substrates and robust dielectric films by state-of-the-art projection photolithography and reactive ion etch. These high fidelity semiconductor fabrication methods enable precise realization of sophisticated proprietary grating designs that provide diffraction efficiency close to 100% and line spacing control to 1 part per million.

No other grating technology is capable of achieving this degree of performance combined with the cost effectiveness and reproducibility afforded by semiconductor volume fabrication technology.

*Left: Typical absolute diffraction efficiency of 940 grooves/mm Telecom Transmission Grating for Lband.*

# High Efficiency Telecom Transmission Gratings T-940L Series

| Optical                                    |              |          |
|--|--------------|----------|
| Description                                | Value        | Units    |
| Line Density                               | 940.07       | Lines/mm |
| Line Density Uniformity                    | ± 0.001      | Lines/mm |
| Angle of Incidence (AOI) <sup>1</sup>      | 48.4±1       | °        |
| Wavelength Range                           | 1570 to 1610 | nm       |
| Optimal polarization <sup>2</sup>          | Any          |          |
| Diffraction Efficiency <sup>3,4</sup>      | ≥ 94         | %        |
| Polarization Dependent Loss <sup>3,4</sup> | ≤ 0.2        | dB       |
| Spectral Non-Uniformity <sup>3,4</sup>     | ≤ 0.2        | dB       |
| Spatial PDL Non-Uniformity <sup>3,4</sup>  | ≤ 0.1        | dB       |
| Insertion Loss Ripple <sup>4,5</sup>       | ≤ 0.1        | dB       |

Notes: <sup>1</sup> Optical grating performance will remain substantially similar over a 5 ° variation in angle of incidence.

<sup>2</sup> p-polarization: electric field vector is perpendicular to the grating lines; s-polarization is orthogonal to p.

<sup>3</sup> Determined from parabolic fit of efficiency as a function of wavelength for s- and p- polarization.

<sup>4</sup> Worst case in the operational wavelength range.

<sup>5</sup> Determined by Fast Fourier Transform method.

| Mechanical               |  |
|--------------------------|--|
| Dimension tolerances     | ±0.2 for grating size and width        |
| Substrate Thickness      | 0.675 ± 0.050 mm                       |
| Material                 | Fused silica, dielectric layers        |
| Scratch/Dig <sup>6</sup> | 60/40 standard, 40/20 and 20/10 custom |

Note: <sup>6</sup> As per MIL-PRF-1380B in the clear aperture; no requirements outside of the clear aperture.

| Substrate dimension options |  |                                   |                                       |  |
|-----------------------------|--|-----------------------------------|---------------------------------------|--|
| Part Number                 | Substrate width, mm <sup>7</sup>                                     | Substrate height, mm <sup>7</sup> | Clear aperture width, mm <sup>8</sup> | Clear aperture height, mm <sup>8</sup> |
| T-940L-2710-94              | 27.45  | 10.0                              | 26.45                                 | 9.0                                    |
| T-940L-2418-94              | 24.0   | 18.0                              | 23.0                                  | 17.0                                   |
| Custom dimensions           | Any rectangle fitting within 135 mm diameter circle (e.g. 130x20 mm) |                                   |                                       |  |

Notes: <sup>7</sup> Width is perpendicular to grating grooves, height is along the grating grooves.

<sup>8</sup> Clear aperture is centered on the substrate.



光技術をサポートする

株式会社オプトサイエンス

<https://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング TEL:03-3356-1064

大阪営業所 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館 TEL:06-6305-2064

名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル TEL:052-569-6064

E-mail : [info@optoscience.com](mailto:info@optoscience.com)

**LightSmyth**  
Technologies a Finisar Company

LightSmyth Technologies • [www.LightSmyth.com](http://www.LightSmyth.com) • Tel + 1-541-431-0026

© 2015 LightSmyth Technologies. All rights reserved. LightSmyth is a pending trademark of Finisar Corporation. Features and specifications are subject to change without notice. 01/15