


1

2


3

4

A

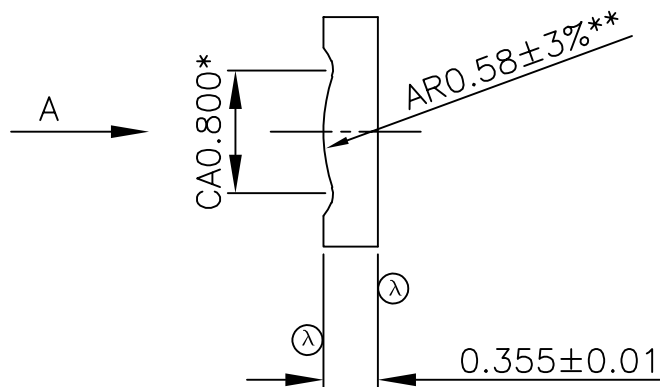

B

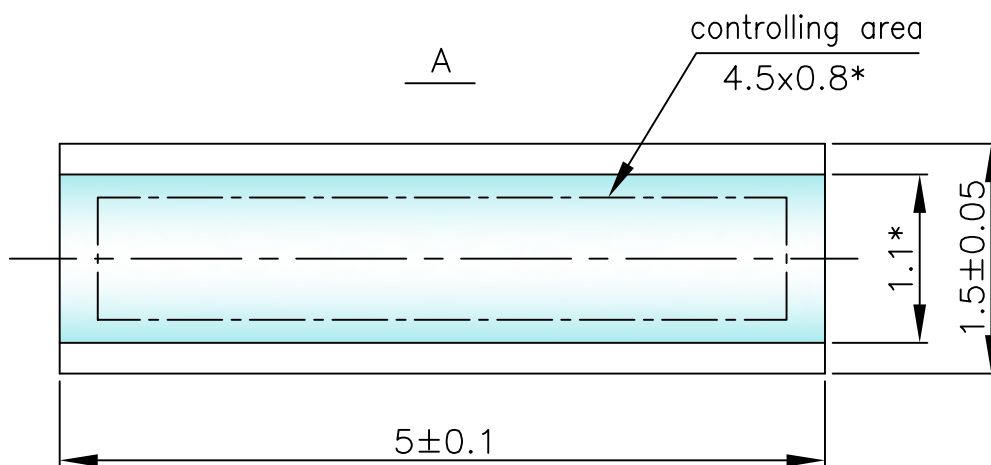

C

D

1. *Informative value
2. **Aspherical profile, $CC=-1$, $A4=0.986307$, $A6=4.041678$
3. Surface form tolerance: $\lambda/8$
4. Surface imperfection: $5/3 \times 0.16$ ISO 10110-7
5. Non-toleranced data: ISO 10110-11
6. Defects outside the controlling area are not defined
7. \odot AR-coating $R < 0.1\% @ 905\text{nm}$

E

F

				FS.09.536		Masstab 20:1	Werkstoff
						STIH-53	
				Datum	Name	SPC-GT-D800-AR0.58	
				Bearb.			
				Gepr.			
				Norm			
						MS.000.00.1195	Blatt
							Bl.
Zust.	Anderung	Datum	Name	(Urspr.)	(Ers. f.)	(Ers. d.)	