

## 248 nm Excimer Laser Mirrors for 0° Incidence


These high performance mirrors are intended for general purpose beam steering tasks in KrF excimer laser based applications and systems.

### Advantages


- High reflectivity
- Superior laser damage resistance
- Excellent mechanical durability

### Common Specifications

|                              |                                      |
|------------------------------|--------------------------------------|
| Chamfer                      | 0.50 mm at 45°                       |
| Clear Aperture               | 85%                                  |
| Diameter Tolerance           | +0.00, -0.13 mm                      |
| Front Surface Flatness       | $\lambda/10$ at 633 nm               |
| Material                     | Fused Silica                         |
| Rear Surface                 | Commercial Polish                    |
| Surface Quality              | 10-5                                 |
| Thickness Tolerance          | $\pm 0.25$ mm                        |
| Wedge                        | <5 arc minutes                       |
| Surface 1 Flatness           | $\lambda/10$ at 633 nm               |
| Surface 1 Surface Quality    | 10-5                                 |
| Surface 1 Coating            | $\geq 99.0\%$ reflectivity at 248 nm |
| Surface 1 Angle Of Incidence | 0°                                   |
| Surface 2 Flatness           | Commercial polish                    |
| Surface 2 Surface Quality    | Commercial polish                    |
| Surface 2 Coating            | None                                 |

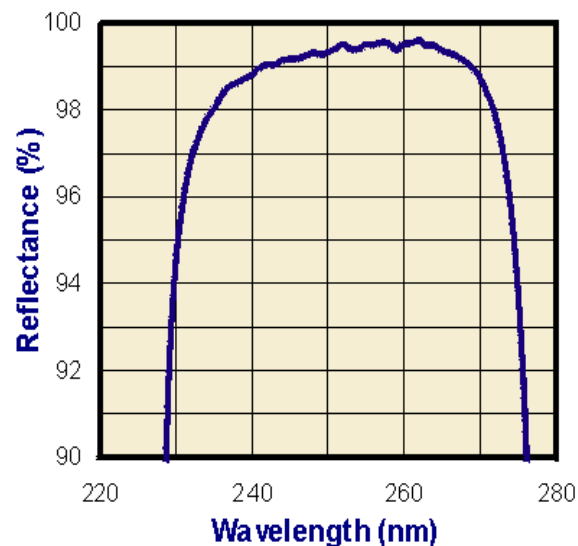

| Part Number | Diameter | Thickness |
|-------------|----------|-----------|
| MR1520      | 25.4     | 9.525     |
| MR1560      | 50.8     | 9.525     |

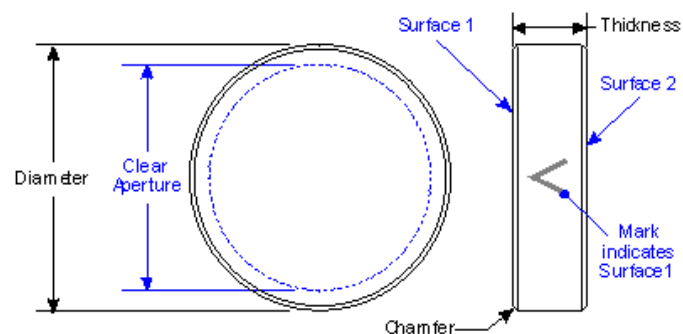

Alpine Research Optics, 6810 Winchester Circle, Boulder, Colorado 80301

sales@arocorp.com 303-444-3420

Copyright © 2006 Alpine Research Optics. All rights reserved.



光技術をサポートする  
株式会社オプトサイエンス

<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング TEL:03-3356-1064  
大阪営業所 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館 TEL:06-6305-2064  
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル TEL:052-569-6064

E-mail : [info@optoscience.com](mailto:info@optoscience.com)