



X-Cite® Spectral Comparison

Fluorescence Illumination • In Control


Broadband Systems

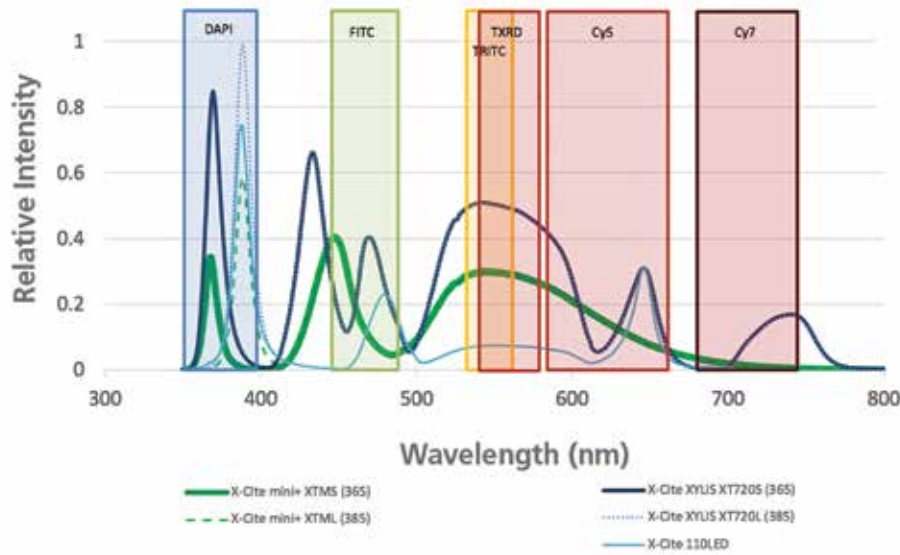

Wavelength Switchable Systems

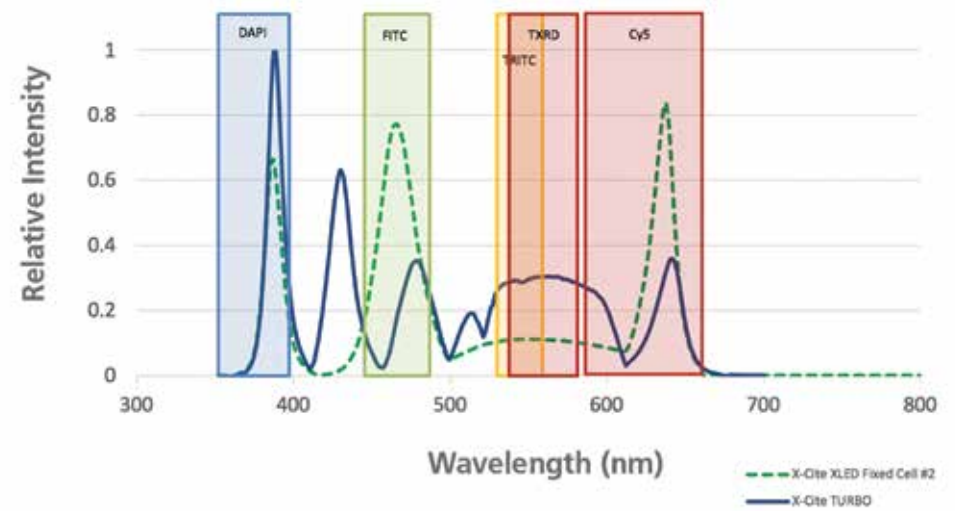

Objective Plane Power

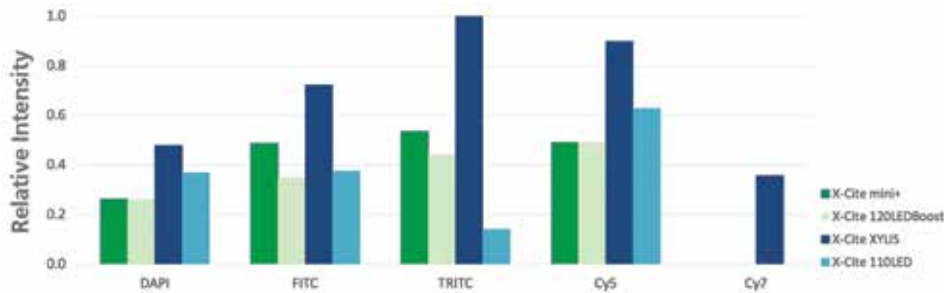

- For LLG coupled systems, measurements were obtained with a 3mm x 1.5m Liquid Light Guide.
- For direct coupled systems, measurements were scaled for realistic comparisons to LLG coupled systems.
- In all cases, light coupling efficiency depends on the microscope optics, filters, dichroics, etc.
- Data represents typical output levels. Output will vary between individual units.
- Filter bands shown: 377/50, 470/40, 545/25, 560/40, 620/60, 710/70.