

NoTail and Pigtailed Components In-line Isolator



These isolators are the smallest in size but the highest in quality in the market. They are ruggedly built to function reliably in a wide variety of environments. Small size, low loss, and low back reflection combine to make these isolators ideal for integration in many fiber optic systems. We also offer the NoTail™ version to eliminate the problems that pigtailed can cause. The short optical path (~ 7cm) of the NoTail™ isolator is desirable for ultra-short pulse and interferometric applications.

Specifications:

| Operating Center Wavelength | | 1550 nm, 1310 nm | | 1064 nm | |
|-----------------------------|-----|--|---|--|---|
| Type | | Single Stage | Double Stage | Single Stage | Double Stage |
| Operating Bandwidth | | ±20 nm | ±20 nm | ±5 nm | ±5 nm |
| Peak Isolation | | > 40 dB | > 52 dB | 40 dB (SM) 38 dB (PM) | 55 dB (SM) 55 dB (PM) |
| Min. Isolation | | > 30 dB | > 45 dB | 30 dB (SM) 35 dB (PM) | 45 dB (SM) 45 dB (PM) |
| Insertion Loss ¹ | Typ | 0.4 dB | 0.5 dB | 1.5 dB | 2.4 dB |
| | Max | 0.6 dB | 0.7 dB | 2.0 dB | 3.4 dB |
| Return Loss (Input/Output) | SM | > 60/55 dB | > 60/55 dB | > 55/50 dB | > 55/50 dB |
| | PM | > 55/50 dB | > 55/50 dB | | |
| PMD (SM) | | < 0.2 ps | < 0.05 ps | | |
| PDL (SM) | | < 0.1 dB | < 0.1 dB | 0.15 dB | 0.15 dB |
| Extinction Ratio (PM) | | >20dB both axes open >25dB fast axis blocked | >20dB both axes open >25dB fast axis blocked | >20dB both axes open >23dB fast axis blocked | >20dB both axes open >23dB fast axis blocked |
| Optical Power Handling | | 500 mW | | 300 mW | |
| Operating Temperature | | 0 to 70 °C | | -5 to 50 °C | |
| Storage Temperature | | -40 to 85 °C | | -40 to 85 °C | |
| Fiber Type | | SM: SMF-28 PM: PM Panda | | SM: HI 1060 PM: PM Panda | |
| Dimensions | | Ø5.5 × 35 mm (pigtailed) Ø9.5 × 65 mm (NoTail™) | | Ø5.5 × 35 mm (pigtailed) Ø9.5 × 65 mm (NoTail™) | |

Notes: Values are referenced without connectors.

1. Insertion loss for NoTail™ version can be up to 0.1 dB higher, excluding connector loss.



Features:

- Polarization insensitive or polarization maintaining
- NoTail™ model available
- Low loss and low reflection
- Compact size
- Environmentally stable
- High quality

Applications:

- Fiber optic amplifier
- WDM systems
- Transmitters and fiber lasers
- R&D laboratories

Dimensions:

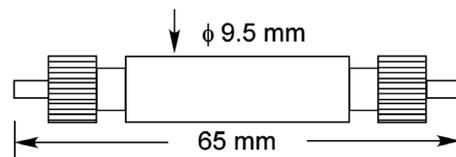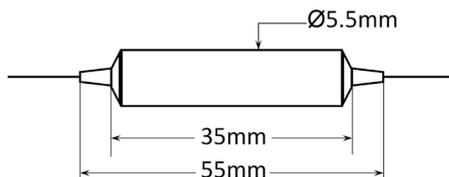

SM or PM isolator

Ordering Information:

Visit our website at www.generalphotonics.com for detailed configuration information.

-91-



光技術をサポートする
株式会社オプトサイエンス

<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング TEL:03-3356-1064
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館 TEL:06-6305-2064
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル TEL:052-569-6064

E-mail:info@optoscience.com