




Opto-Link
Corporation Ltd

Polarization Independent Optical Circulators

Fiber Optic Circulator is a non-reciprocal device that redirects light from port to port in one direction. The device is designed for use in WDM systems, optical amplifiers and sensor applications. The component features high power, high isolation, high return loss, and excellent environmental stability.

Types

- 3 & 4 Ports
- High Power (300/1000mW)
- 1310nm/1550nm Window

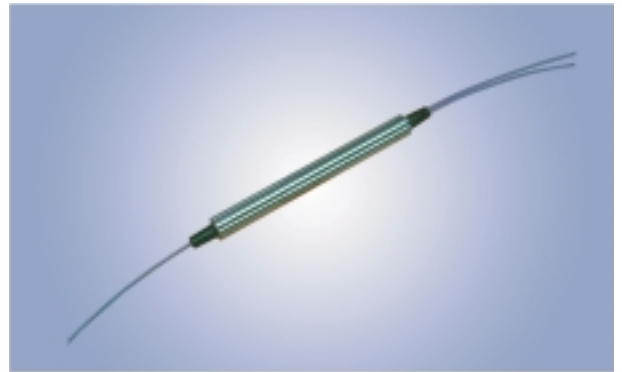

Applications

- WDM Systems
- Dispersion Compensation
- Sensor Applications
- Optical Amplifiers
- OTDR Applications

Features

- Excellent Stability and Reliability
- High Isolation
- High Return Loss
- Low Insertion Loss
- Low Polarization Dependent Loss
- Low Polarization Mode Dispersion



光技術をサポートする
株式会社オプトサイエンス
<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング
TEL:03(3356)1064 FAX:03(3356)3466 E-mail:info@optoscience.com
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館
TEL:06(6305)2064 FAX:06(6305)1030 E-mail:osk@optoscience.com
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル
TEL:052(569)6064 FAX:052(569)8064 E-mail:ngo@optoscience.com



Opto-Link
Corporation Ltd

SPECIFICATIONS

Polarization Independent Optical Circulators (1310nm, 1550nm)


Parameter	3 ports	4 ports	Units
Wavelength Range	1310, 1550	1310, 1550	nm
Transmitting Direction	1->2, 2->3	1->2, 2->3, 3->4	--
Insertion Loss	< 0.8	< 0.8	dB
Channel Isolation	> 50	> 45	dB
PDL	< 0.1	< 0.15	dB
PMD	< 0.05	< 0.05	ps
TDL	0.15	0.15	dB
WDL	0.15	0.15	dB
Return Loss	> 50	> 50	dB
Cross Talk	> 50 (up to 60)	> 50 (up to 60)	dB
Handling Power	300, 1000	300, 1000	mW
Operating Temperature	0 to +70	0 to +70	°C
Storage Temperature	-40 to +85	-40 to +85	°C

*Above specifications are for device without connectors.

Polarization Independent Optical Circulators (C+L Band)

Parameter	3 ports	4 ports	Units
Wavelength Range	1525 - 1610	1525 - 1610	nm
Transmitting Direction	1->2, 2->3	1->2, 2->3, 3->4	--
Insertion Loss	< 0.9	< 1.2	dB
Channel Isolation	> 40	> 30	dB
PDL	< 0.15	< 0.2	dB
PMD	< 0.05	< 0.05	ps
TDL	0.2	0.2	dB
WDL	0.4	0.4	dB
Return Loss	> 50	> 50	dB
Cross Talk	> 50	> 50	dB
Handling Power	500	500	mW
Operating Temperature	0 to +70	0 to +70	°C
Storage Temperature	-40 to +85	-40 to +85	°C

*Above specifications are for device without connectors.

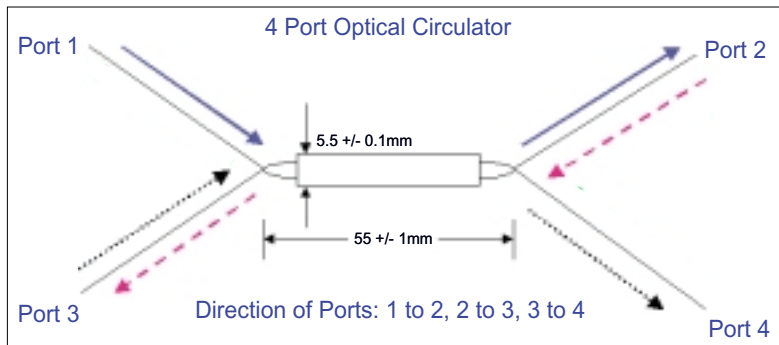

ORDERING CODES

OLCIR - I - [] - [] - [] - [] - []

Port	Code
3 ports	3
4 ports	4

Handling Power	Code
300mW	300
1000mW	1000

Wavelength	Code
1310 nm	131
1550 nm	155
1525 - 1610nm	CL

Cable Diameter	Code
250 um	25
900 um	90

Connector Type	Code
No Connector	NC
FC/PC	FP
SC/PC	SP
FC/APC	FA
SC/APC	SA
LC/PC	LP
MU/PC	MP
Others	XX

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2007 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com