




Opto-Link
Corporation Ltd

Polarization Maintaining Optical Circulators

Fiber Optic Circulator is a non-reciprocal device that redirects light from port to port in one certain direction. The device is designed for use in WDM systems, optical amplifiers and sensor applications. The component features high power, high isolation, high return loss, and excellent environmental stability.

Types

- 3 & 4 Ports
- High Power (300/500mW)
- 1064/1310/1550nm Window

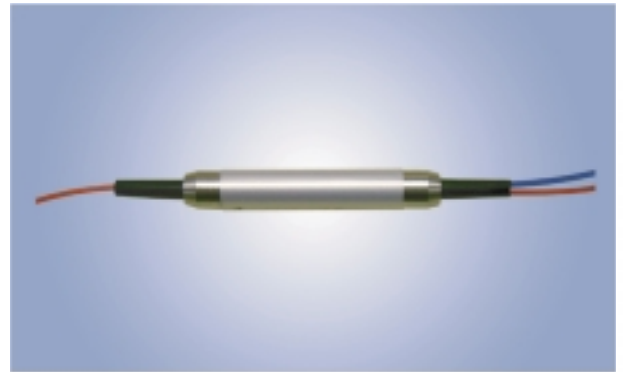

Applications

- WDM Systems
- Dispersion Compensation
- Sensor Applications
- Optical Amplifiers
- OTDR Applications

Features

- Excellent Stability and Reliability
- High Isolation
- High Return Loss
- Low Insertion Loss
- High Extinction Ratio



光技術をサポートする
株式会社オプトサイエンス
<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング
TEL:03(3356)1064 FAX:03(3356)3466 E-mail:info@optoscience.com
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館
TEL:06(6305)2064 FAX:06(6305)1030 E-mail:osk@optoscience.com
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル
TEL:052(569)6064 FAX:052(569)8064 E-mail:ngo@optoscience.com



Opto-Link
Corporation Ltd

SPECIFICATIONS

Polarization Maintaining Optical Circulators


Parameter	Values		Units
Center Wavelength	1310 or 1550	1064	nm
Operating Wavelength Range	+/- 30	+/- 5	nm
3 Ports Configuration	1->2, 2->3	1->2, 2->3	--
4 Ports Configuratoin	1->2, 2->3, 3->4	1->2, 2->3, 3->4	--
Insertion Loss (3 Ports)	Typ 0.7, Max 0.9	Typ 1.8, Max 2.1	dB
Insertion Loss (4 Ports)	Typ 0.8, Max 1.1	Max 2.8	dB
Isolation	Typ 46, Max 52	Typ 30	dB
Min. Extinction Ratio	22 (20 for 4 Ports)	20	dB
Min. Cross Talk	50	50	dB
Min. Return Loss	55	50	dB
Handling Power	300	300	mW
Max. Tensile Load	5	5	N
Operating Temperature	-5 to +70	-5 to +50	°C
Storage Temperature	-40 to +85	-40 to +85	°C

*Above specifications are for device without connectors.

Polarization Maintaining Optical Circulators (Special Tailor Made: 4->1)

Parameter	Values	Units
Center Wavelength	1550	nm
Operating Wavelength Range	+/-20	nm
Max. Insertion Loss (1->2, 2->3) +0.3dB with connector	1.5	dB
Max. Insertion Loss (3->4, 4->1) +0.3dB with connector	1.5	dB
Min. signal cross talk (1->4, 2->1) at slow axis	20	dB
Min. signal cross talk (3->2, 4->2) at slow axis	20	dB
Min. Directivity (1->3, 2->4)	50	dB
Min. polarization cross talk (1->2, 2->3) at fast axis	20	dB
Min. polarization cross talk (3->4, 4->1) at fast axis	20	dB
Min Extinction ratio -2dB with connector	18	dB
Min. Return Loss -5dB with connector	45	dB
Handling Power	500	mW
Max. Tensile Load	5	N
Operation Temperature	-5 to +70	°C
Storage Temperature	-40 to +85	°C

*Above specifications are for device without connectors.

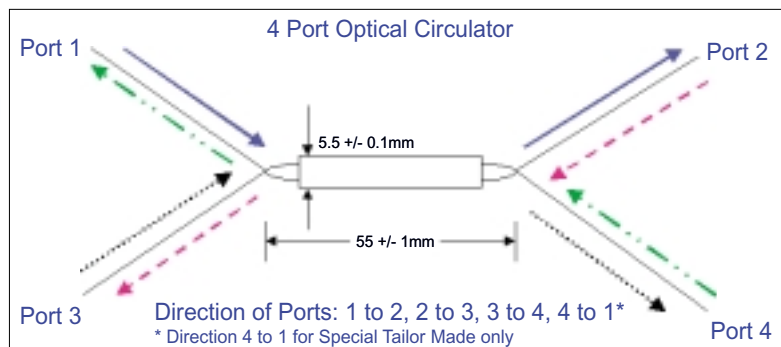

ORDERING CODES

OLCIR - P - [] - [] - [] - [] - []

Port	Code
3 ports	3
4 ports	4
Tailor Made 4 -> 1	S

Handling Power	Code
300mW	300
500mW	500

Connector Type	Code
No Connector	NC
FC/PC	FP
SC/PC	SP
FC/APC	FA
SC/APC	SA
LC/PC	LP
MU/PC	MP
Others	XX

Wavelength	Code
1064 nm	106
1310 nm	131
1550 nm	155

Cable Diameter	Code
250 um	25
900 um	90

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2007 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com