


FiberSwitch® Fiber optical multiple switches / switch systems

Switch system consisting of two eol 1×16
and one mol 1×16
with one control unit (interface selection:
Ethernet; USB or RS232)

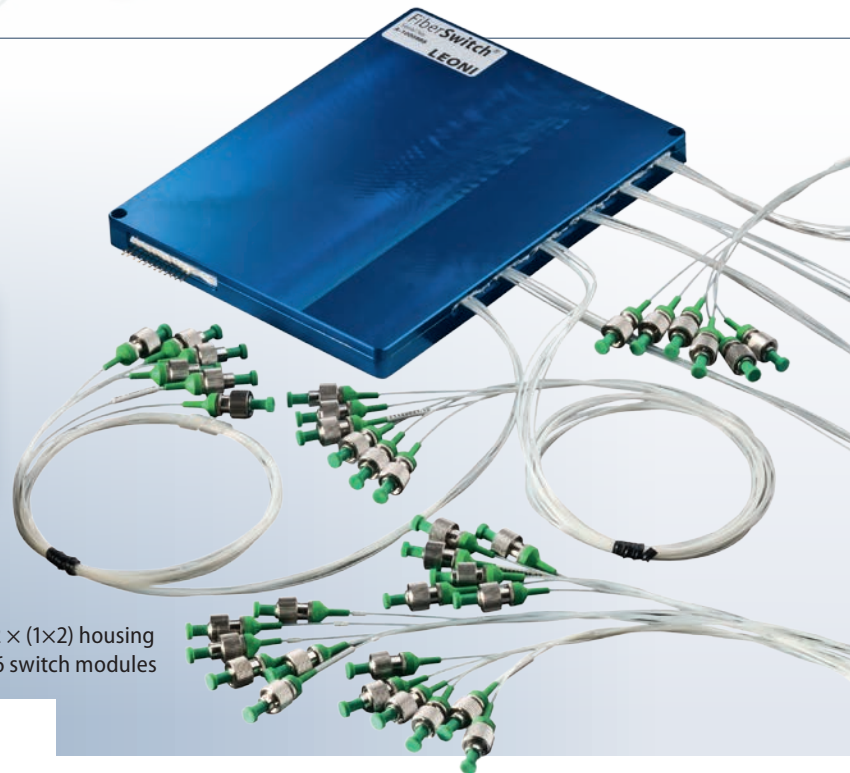

eol 12 × (1×2) housing
with 6 switch modules

eol M × (1×N) · mol M × (1×N)

For requests please specify

- Number of channels (N 1...16)
- Number of switch modules M
- Spectral range
(Operating wavelength range / UV-VIS; VIS-IR; Broadband)
- Maximum optical power
- Fiber type (e.g. E9/125 or similar or MM Core Diameter, NA, GI or SI)
- Pigtail length (m)
- Connector type(s) (e.g. FC, SC, SMA, ST)
- Electrical interface (z.B. RS232, TTL, Ethernet, USB)
- Special requirements
- Higher number of output channels N > 4 in different housing versions available
- Higher number of switching modules M upon request
- Further specifications please see pages for single switches

Switch systems

- Combinations of several different switches (incl. singlemode and multimode) in different housing versions, e.g. 19" racks available
- Control of different switches through one single interface

Number of channels	eol 1×2	eol 1×4	mol 1×2	mol 1×4
No. of switch modules M	2...12	2...6	2...6	2...6
Housing dimensions[mm]	130×106×13.5 (M 2...6)		130×106×13.5 (M 2...3)	
	134×172×13.5 (M 7...12)		134×172×13.5 (M 4...6)	
Housing options	Alu Compact table top, 19" rack; different sizes on request			



光技術をサポートする
株式会社オプトサイエンス

<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング TEL:03-3356-1064
大阪営業所 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館 TEL:06-6305-2064
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル TEL:052-569-6064

E-mail : info@optoscience.com