


FiberSwitch® Fiber optical full matrix

matrix N×M (N,M≤16) singlemode and multimode

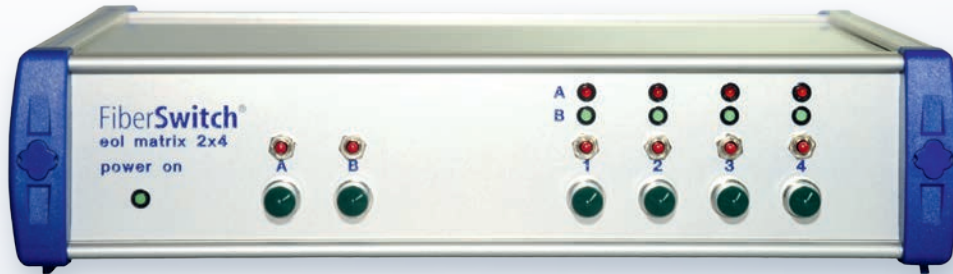


eol full matrix 2×4, Alu Compact 4

matrix N×M (N,M≤16)

For requests please specify

- Channel configuration (N×M)
- Spectral range (operating wavelength range)
- Optical power (max.): High power version available
- Fiber type (e.g. G100/140; SMF28)
- Polarization maintaining available
- Connector type(s) (e.g. FC, SC, LC, E2000)
- Electrical interface (e.g. RS232, Ethernet, USB)
- Special requirements (e.g. Manual control on front-panel)

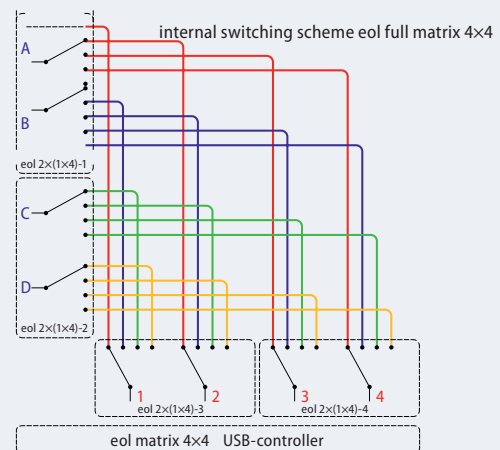

Spectral range		VIS	NIR I	NIR II	IR
Specifications for singlemode					
Operating wavelength	[nm]	400 – 670	600 – 850	900 – 1200	1260 – 1650
Insertion loss max. (typisch)	[dB]	6 (5)	3 (2)	3 (2)	2.5 (1.6)
Return loss	[dB]	> 40	> 55	> 55	> 60
Crosstalk	[dB]		≤ -55		
Repeatability	[dB]		≤ 0.01		
Polarization dependent loss PDL	[dB]		≤ 0.1		
Switching times	[ms]		≤ 5		
Guaranteed lifetime	[cycles]		> 10 ⁸		
Switching frequency	[s ⁻¹]		≤ 30		
Operating voltage	[V]		110 – 240		
Power consumption	[mW]		< 450		
Operating temperature	[°C]		0 up to +60		
Storage temperature	[°C]		-40 up to +80		
Housing (standard)			Alu Compact or 19" rack*		

*) Custom housings on request



光技術をサポートする
株式会社オプトサイエンス

<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング TEL:03-3356-1064
大阪営業所 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館 TEL:06-6305-2064
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル TEL:052-569-6064

E-mail : info@optoscience.com