




Redefining Randomness

# Quantis QRNG PCIe-40M & PCIe-240M

Only Quantum Random Number Generators (QRNGs) are intrinsically random and provably unpredictable



Since 2001, the Quantis QRNG family is commonly used as trusted source of randomness for multiple applications: to generate high-quality keys needed by cryptographic modules, to effectively protect access to private networks, servers, virtual machines and applications; to protect data integrity and confidentiality. Other applications include gaming, scientific simulations or modeling.

## Provably secure

Simplicity is the strength of the ID Quantique Quantum Random Number Generators (QRNGs). The Quantis QRNG family exploits elementary quantum optic processes that are fundamentally probabilistic to produce true randomness. As the quantum processes underlying the QRNG are well understood and characterized, their inner working can be clearly modeled and controlled to produce the highest entropy from the first bit.

Quantis PCIe-40M and PCIe-240M embed IDQ20MC1 chips, ID Quantique's latest QRNG technology, that generate randomness from the shot noise of a light source captured by a CMOS image sensor. They can generate random bits directly from the entropy source (entropy data mode), or after a NIST compliant post-processing (RNG data mode). Live status verification and entropy source health monitoring performed at chip level ensure the PCIe cards always provide the highest entropy, and any failure or attacks are detected.

## Compliant and certified

The new Quantis PCIe-40M and PCIe-240M are compliant with NIST SP800 90A/B/C recommendations and passes IID, non-IID tests, DieHarder and NIST SP800-22 test suites. METAS and CC certifications of these two new products are under way.

Legacy Quantis PCIe and USB have been certified by leading commercial entities, well-known international institutes and governments worldwide. Legacy PCIe and USB also present an AIS31 version that is compliant with the German BSI's AIS31 validation criterias.

## Applications



Confidentiality and integrity of sensitive data



Artificial Intelligence  
(Machine and Deep Learning)



Security of end-consumer devices, machines and networks



Scientific Modeling & Simulations



Financial transactions / Blockchain



Gaming / Random drawings

## Why choose Quantis QRNGs?

Provably secure source of entropy


Quantum optical process, intrinsically random

Live status verification & entropy source health monitoring

True randomness from the first bit

Integrated NIST compliant post-processing

Easy Integration in most operating systems

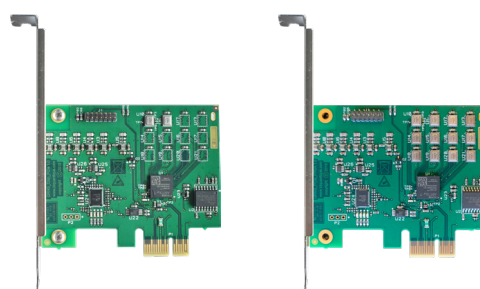

## Quantis QRNG modules at a glance

Model	PCIe-40M	PCIe-240M
<b>PERFORMANCE</b>		
Quantum entropy source	38.3 Mbps $\pm$ 5%	232 Mbps $\pm$ 5%
RNG Data Output (embedded NIST compliant DRBG)	9.6 Mbps $\pm$ 5%	58 Mbps $\pm$ 5%
Live status verification & entropy source health monitoring	✓	✓
<b>CERTIFICATIONS</b>		
NIST SP800-90A/B/C, SP800-22 and DieHarder test suite compliance	✓	✓
METAS Certification	pending	pending
BSI Common Criteria & AIS 31 certification	pending	pending
<b>ENVIRONMENTAL</b>		
Thermal noise contribution	<1% (fraction of random bits arising from thermal noise)	
Storage temperature	-40°C to +85°C	-40°C to +85°C
Operating temperature	0°C to +50°C	0°C to +50°C
<b>PHYSICAL CHARACTERISTICS</b>		
Dimensions (mm)	80 x 63.75	80 x 63.75
Specification	PCI Express Base 1.0a compliant	
<b>OS SUPPORTED (QUANTIS LIBRARY AND EASYQUANTIS APPLICATION)*</b>		
Windows 10	✓	✓
Ubuntu 18.04	✓	✓
CentOS 7	✓	✓

(\*) Quantis library enables the production of random binary data, integers and floating point numbers. It can be used to access multiple Quantis generators and includes advanced functionalities such as random data scaling. The Quantis extensions libraries implement a randomness extractor which can be used to postprocess the output of the Quantis QRNG. Easy Quantis application allow to read and display random numbers or store them in a file.

Disclaimer: The information and specification set forth in this document are subject to change at any time by ID Quantique without prior notice.  
Copyright©2020 ID Quantique SA - All rights reserved - Quantis QRNG PCIe New Generation - Specifications as of April 2020.

ID QUANTIQUE SA

Chemin de la Marbrerie 3

1227 Carouge/Geneva

Switzerland

T +41 22 301 83 71

F +41 22 301 89 79

info@idquantique.com

www.idquantique.com



光技術をサポートする  
**株式会社オプトサイエンス**

<https://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング TEL:03-3356-1064  
大阪営業所 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館 TEL:06-6305-2064  
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル TEL:052-569-6064

E-mail : info@optoscience.com