

## 1064 nm Solid State Laser Mirrors for 0° Incidence


These high performance mirrors are intended for general purpose beam steering tasks in Nd:YAG and Nd:YVO4 laser based applications and systems.

### Advantages


- High reflectivity
- Superior laser damage resistance
- Excellent mechanical durability

### Common Specifications

Chamfer	0.50 mm at 45°
Clear Aperture	85%
Diameter Tolerance	+0.00, -0.13 mm
Front Surface Flatness	$\lambda/10$ at 633 nm
Material	Fused Silica
Rear Surface	Commercial Polish
Surface Quality	10-5
Thickness Tolerance	$\pm 0.25$ mm
Wedge	<5 arc minutes
Surface 1 Flatness	$\lambda/10$ at 633 nm
Surface 1 Surface Quality	10-5
Surface 1 Coating	$\geq 99.5\%$ reflectivity at 1064 nm
Surface 1 Damage Threshold	20 J/cm <sup>2</sup> @ 3 ns
Surface 1 Angle Of Incidence	0°
Surface 2 Flatness	Commercial polish
Surface 2 Surface Quality	Commercial polish
Surface 2 Coating	None

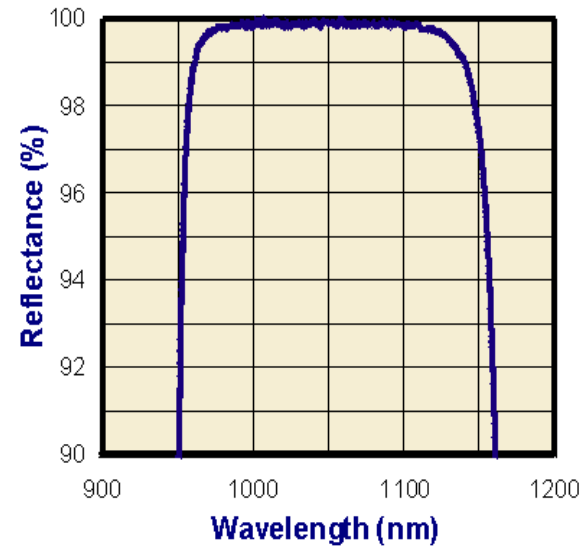

Part Number	Diameter	Thickness
MR8020	25.4	9.525
MR8060	50.8	9.525

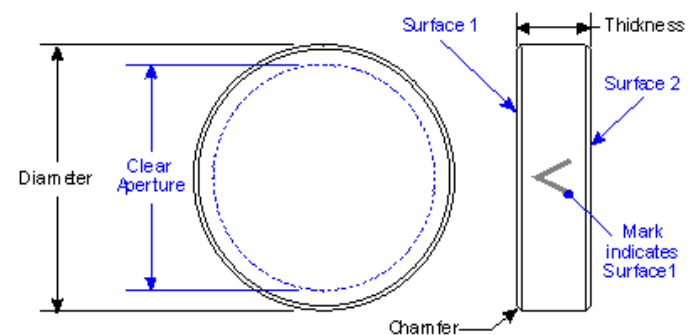

Alpine Research Optics, 6810 Winchester Circle, Boulder, Colorado 80301

sales@arocorp.com 303-444-3420

Copyright © 2006 Alpine Research Optics. All rights reserved.



光技術をサポートする  
株式会社オプトサイエンス

<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング TEL:03-3356-1064  
大阪営業所 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館 TEL:06-6305-2064  
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル TEL:052-569-6064

E-mail: info@optoscience.com